

EN



LR 1160.1

LR 1003.04.07/08
www.liebherr.com

LIEBHERR


Crawler cranes


Concept and characteristics	3
Technical description	6
Dimensions	8
Transport dimensions and weights	9
Self-assembly system	14
Boom combinations	16
Main boom 2018.xx	18
Luffing jib 1309.xx	20
Luffing jib 1713.xx	25
Fixed jib 1008.xx	30
Fixed jib 0806.xx	33

Remarks

- The load capacities stated are valid for lifting operation only (corresponding with crane classification according to ISO 4301-1, crane group A1).
- Machine is standing on firm, horizontal ground.
- The weight of the lifting device (pulley block, hoist ropes, shackles, etc.) must be deducted from the load capacity.
- Additional equipment on boom (e.g. walkways) must be deducted from the load capacity.
- The max. admissible wind speed can be preselected in the LML software and referred to in the load chart.
- Working radii are measured from centre of swing ring and under load.
- The lifting capacities are valid for 360 degrees of swing.
- Calculation of stability under load is based on ISO 4305 Table 1+2+3, tipping angle 4°.
- The steel structures are calculated according to EN 13001-1; EN 13001-2.
- The last digits of the given dimensions are rounded to 0 and 5 and may differ from the actual dimensions.
- Weights may vary depending on the delivered configuration of the machine, filling level of the tanks, as well as generally valid tolerances.
- The illustrations in this brochure may include options which are not within the standard scope of supply of the machine.

Concept and characteristics

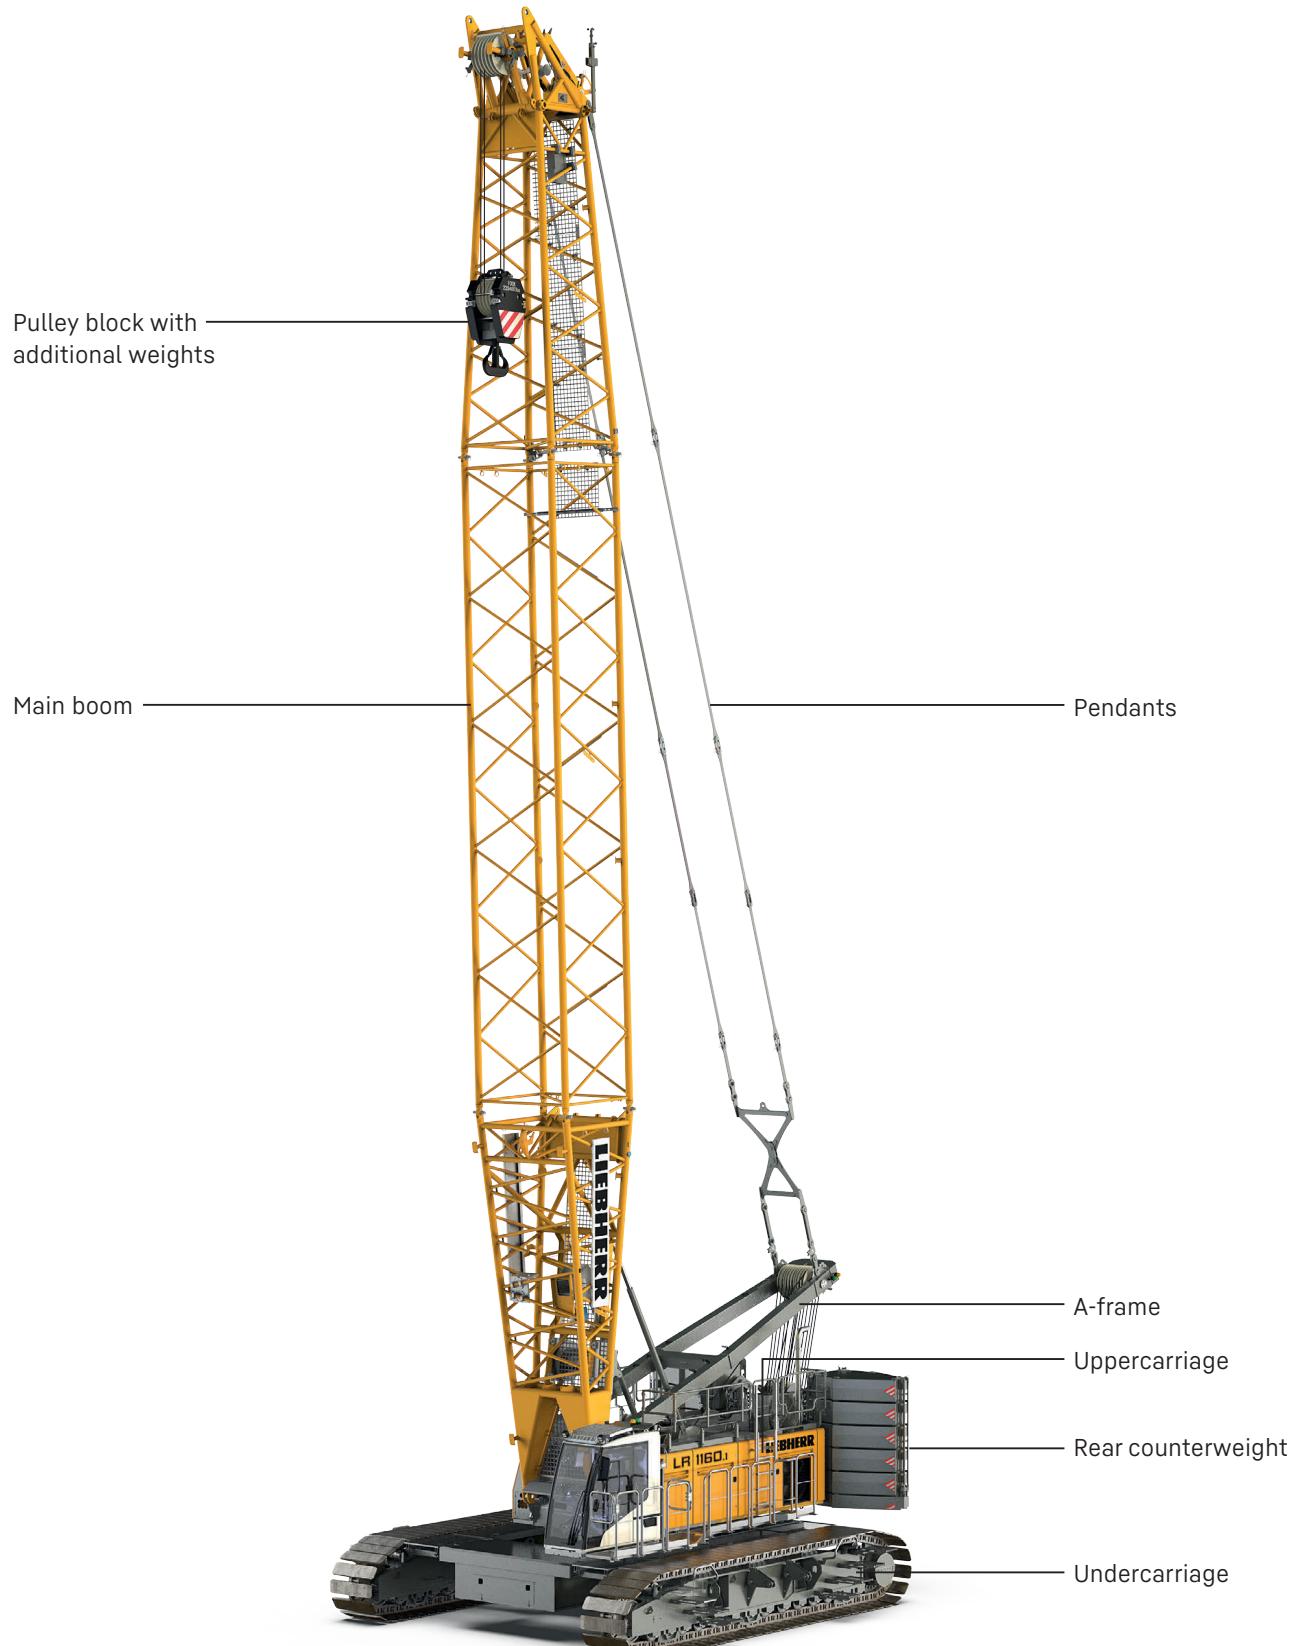

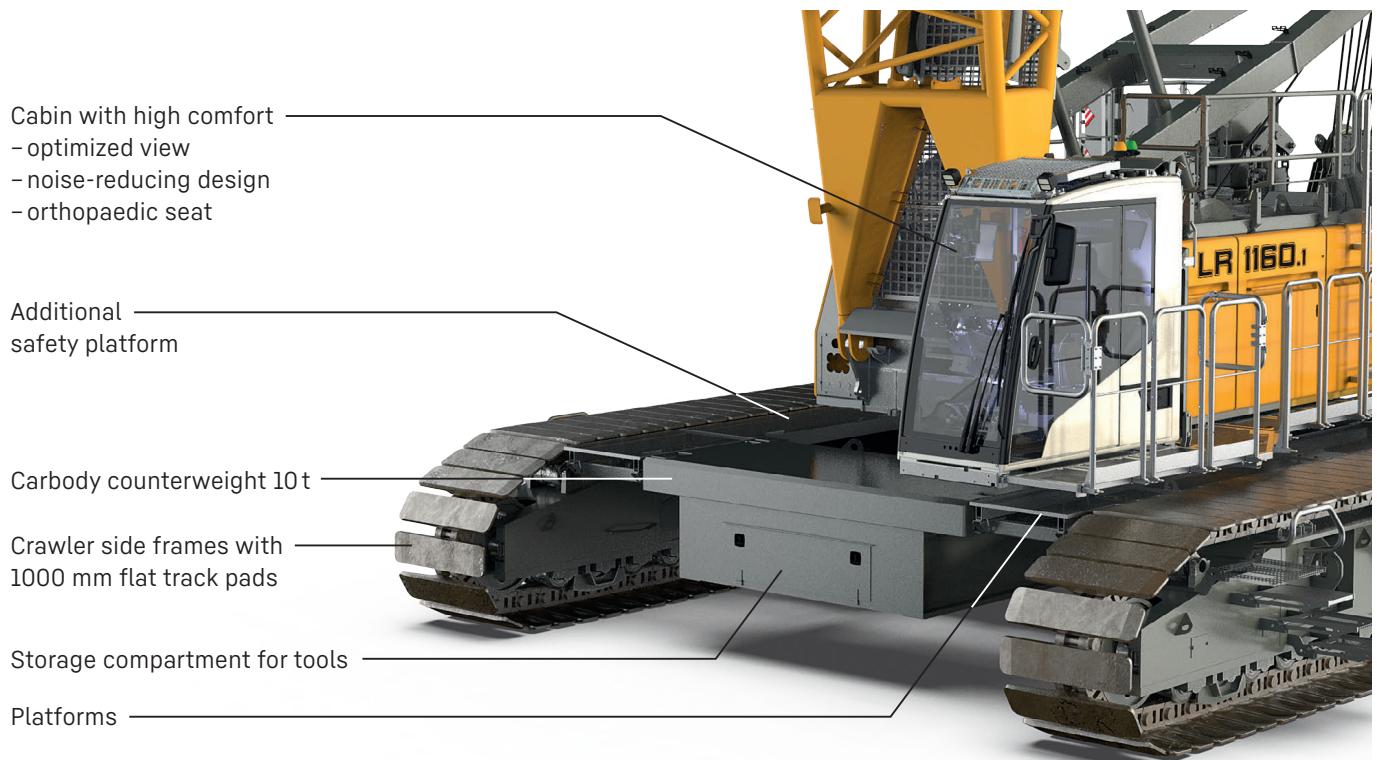

High performance

A strong, efficient and reliable diesel engine of the newest generation provides high performance and enables several movements to be carried out simultaneously.

Ground pressure


The actual ground pressure is calculated according to the configuration and position of the machine and displayed in the operator's cabin. Using the optional Liebherr Crane Planner the actual ground pressure can already be calculated and displayed in the planning stage.

Cabin with high comfort

Optimised field of vision combined with enhanced comfort: an orthopaedic operator's seat with heating and cooling functions, as well as precise and ergonomic controls are included.

Control system

Easy and intuitive handling of control, service and machine functions through a large, clear colour monitor. Built for extreme environmental conditions.

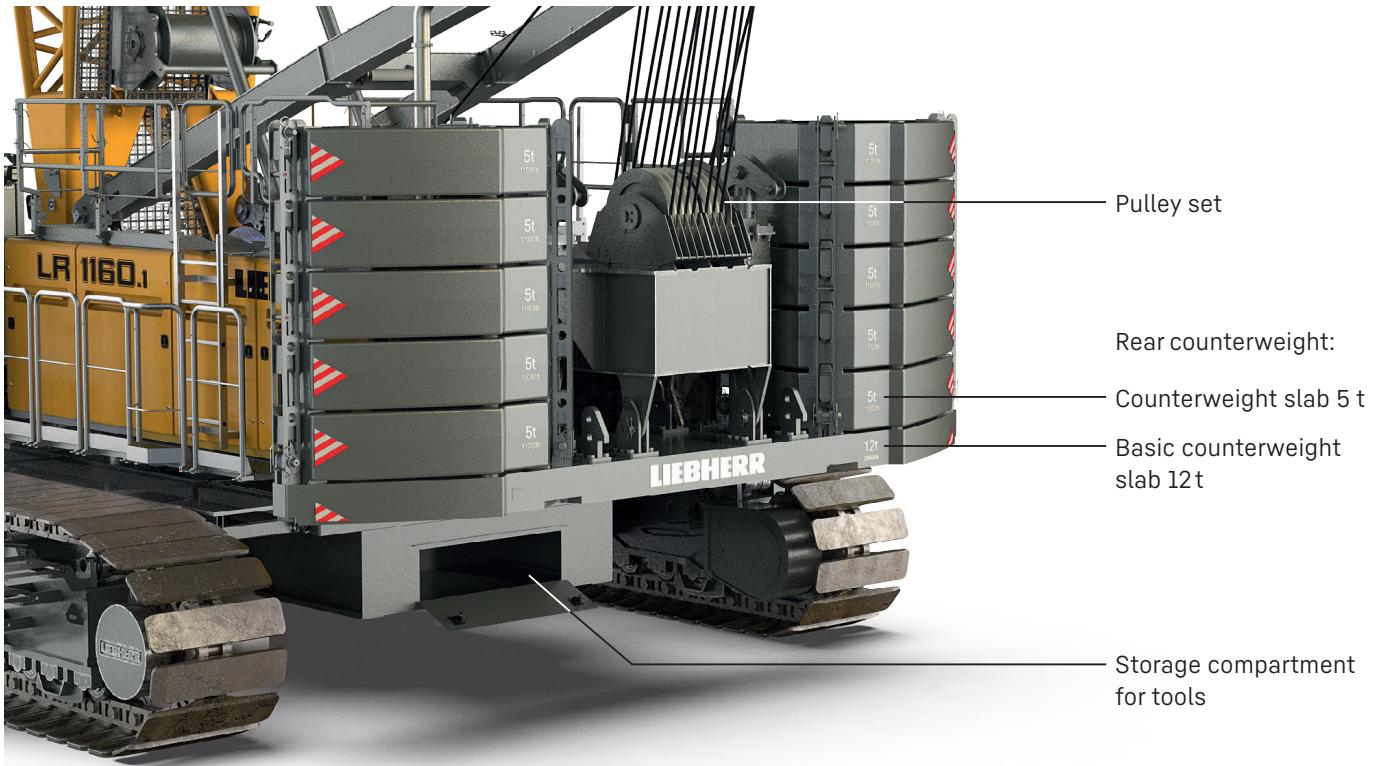

Efficient self-assembly system and short assembly times

The self-assembly system enables safe, independent and quick assembly/disassembly of the crawler side frames, the carbody and rear counterweights, as well as boom elements.

Mobility

Crane parts are optimized for transportation. The maximum transport width is 3 m.

Easy service

The design ensures easy maintenance and service as well as safe access to the components.

Boom/jib

A variety of boom systems and configurations allow for optimum operation on the most diverse jobsites.

Technical description



Diesel engine

Power rating according to ISO 9249	230 kW (308 hp) at 1700 rpm
Engine type	Liebherr D 944 A7-04
Fuel tank capacity	790 l with continuous level indicator and reserve warning
Exhaust certification	97/68 EC Stage IV; EPA/CARB Tier 4f 97/68 EC Stage V; EPA/CARB Tier 4f ECE-R.96 Power Band H non-certified emission standard



Swing gear

Drive system	with fixed axial piston hydraulic motors, planetary gearbox, pinion
Swing ring	roller bearing with external teeth
Brake	hydraulically released, spring-loaded multi-disc holding brake
Swing speed	0-3 rpm continuously variable
Speed control	both swing modes are possible – speed control or free swing for speed control: a multi-disc holding brake locks automatically at zero swing motion.



Noise measurement data and vibration

Noise emission	according to 2000/14/EC directive
Emission sound pressure level L _{PA}	69.9 dB(A) (in the cabin)
Guaranteed sound power level L _{WA}	105 dB(A) (of the machine)
Vibration transmitted to the machine operator	< 2.5 m/s ² (to the hand-arm system) < 0.5 m/s ² (to the whole body)



Hydraulic system

Hydraulic pumps	double axial displacement pump in open loop hydraulic system allows all functions to be operated simultaneously automatic working pressure cut-off to minimize peak pressure
Hydraulic oil tank capacity	650 l
Max. working pressure	350 bar
Hydraulic oil	electronic monitoring of alle filters use of synthetic environmentally friendly oil



Control

Control system	includes all control and monitoring functions, designed to withstand extreme environmental conditions and heavy construction tasks
Display	high resolution monitor in the operator's cabin, clear display of complete machine operating data, warnings and failure indications in the required language
Operation	several movements can be performed simultaneously thanks to electro-hydraulic proportional control, all categories of loads can be positioned with utmost precision



Crawlers

Drive system	with fixed axial piston hydraulic motors
Crawler side frames	maintenance-free, with hydraulic chain tensioning device
Brake	hydraulically released, spring-loaded multi-disc holding brake
Drive speed	0-1.5 km/h
Flat track pads	width 1000 mm




Hoisting gear

Standard crane winches 1+2	Internal low-maintenance planetary gearbox in oil bath, load support by the hydraulic system, spring-loaded, multi-disc holding brake, pressure controlled, variable flow hydraulic motors for the main winches, full utilisation of engine power as the winch speed is automatically adjusted to suit the respective line pull
Line pull in the 7 th layer	120 kN
Rope diameter	26 mm
Drum diameter	580 mm
Rope speed	0-136 m/min
Rope capacity in 7 layers	489 m
Option – winch with free fall	Free fall: clutch and braking functions are provided by the service brake (low wear and maintenance-free multi-disc brake in compact design)

Operating weight

Composition of operating weight	basic machine with crawlers winches 1+2, A-frame 17 m main boom, consisting of boom foot (7 m), boom head (6 m) and boom section (6 m) 62.3 t rear counterweight (10×5 t + 1×12 t + 0.3 t) 20 t carbody counterweight (2×10 t) 160 t pulley block approx. 167 t
Total weight	

Operation modes

	 Lifting mode	 Grab mode	 Personnel lifting mode
 Land	✓	✓	✓
 Floating structure (barge operation)	✓	✓	✓ *

* only valid for jack-up barges

Optional equipment

Basic machine

Main winches 12 t with free fall

Painting in customer design

Load hook 12.5 / 40 / 80 / 100 / 160 t

Economy and ecology

Eco-Silent Package

Aux. power unit (APU, 2.8 kW)

Boom/jib

Luffing jib: luffing winch

Boom/jib other

Walkway for main boom foot, incl. fall protection

Walkway for main boom head, incl. fall protection

Rope guide for main boom walkway, incl. fall protection

Additional fall protection harness for 1 person

Walkways for main boom sections 3 / 6 / 12 m

Walkways for main boom sections 3 / 6 / 12 m, incl. fall protection

Application packages

Operation mode: personnel lifting (O)

Operation mode: barge operation (O)

Operation mode: foundation work (O)

Operation mode: wind speed pre-selection (S)

Operation mode: travelling with load (S)

Winch synchronization

Radio remote control

Rope reeling function via radio remote control

Assembly radio remote control

Use of luffing jib winch as auxiliary winch

Tagline winch 2 t free fall

Main winch constant tension for one winch

Two hook operation

Special features

Crane Planner 2.0

LIDAT

Self-assembly system

Jack-up system standard / telescopic

Self-assembly system counterweight

Self-assembly cylinder

Reeving winch

Track shifting hydraulic

Service package

Refuelling pump diesel / AdBlue

Cold package -25 °C / -40 °C

Hydraulic oil bypass filter

Central lubrication swing ring bearings / outside

Liebherr hydraulic oil plus (longlife & bio)

Liebherr hydraulic oil plus arctic (longlife & bio)

Liebherr hydraulic oil plus arctic (longlife)

Safety features

Assistance system: Boom Up-and-Down Assistant

Assistance system: Horizontal Load Path

Assistance system: Vertical Line Finder

Assistance system: Ground Pressure Indication and Visualization

Rear and side view cameras

Winch camera

Zoom camera at boom head

Safety upgrade APAVE

Platforms and railings on uppercarriage 570 mm

Additional access ladder for boom assembly

Railings on rooftop foldable

Railings for cabin platform

Vandalism cabin protection

Cabin protection roof, FOPS level 1

Lifting height indication for both hoist winches

Plug&Play diesel-hydraulic back-up unit 18.4 kW

Swing and boom radius limit device

Aircraft warning light

Swing warning light

Lightning rod

Mechanical angle display

Air intake shut-off valve

Access control

Operator's comfort

Additional access ladder

Additional floodlights

Cabin air conditioner

Cabin tilting device hydraulic


Gear oil level warning

Litronic additional language

(S) standard, (O) option


Dimensions

Basic machine with undercarriage

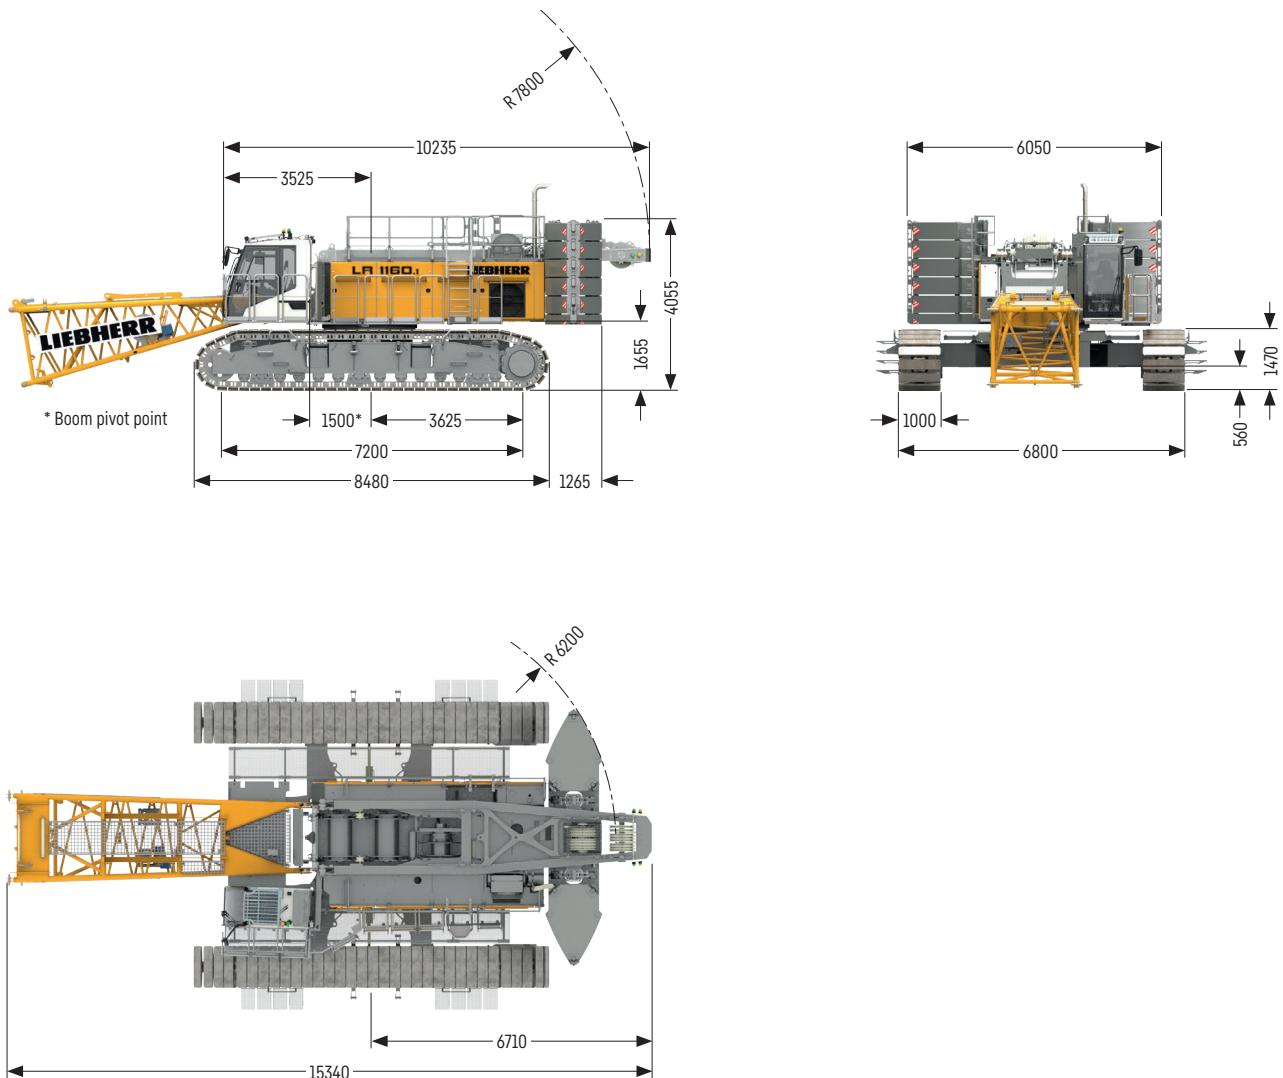

Transport dimensions and weights

Basic machine and main boom 2018.xx

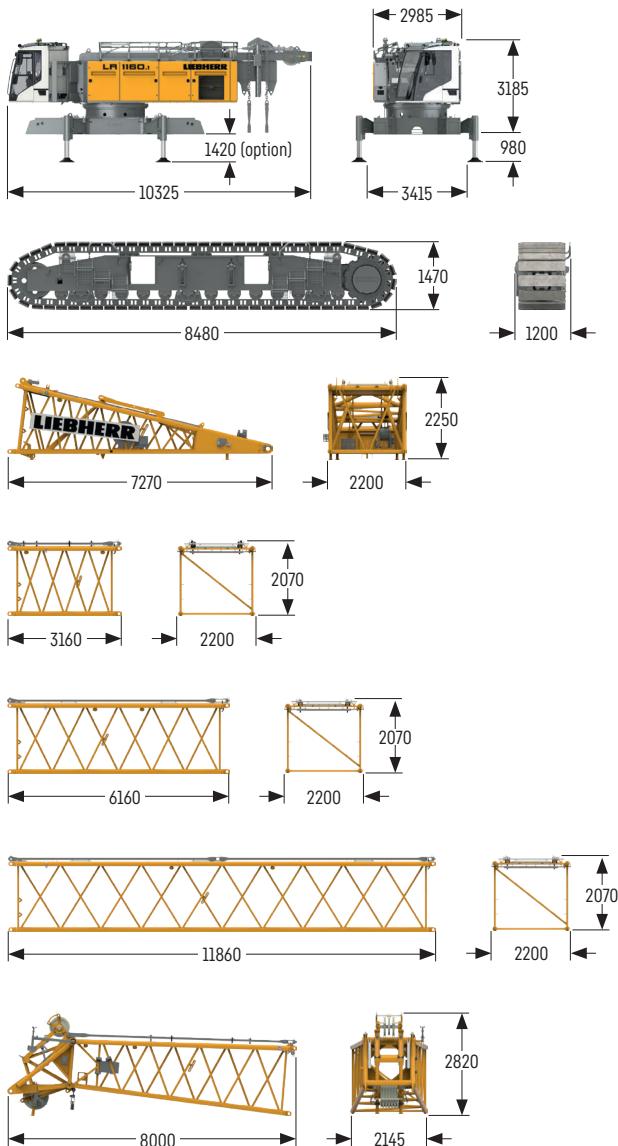

Basic machine

Weight without hoist rope	kg 35000
Weight of hoist ropes	kg/m 3.4
with A-frame 1, winches 1+2 (2x 120 kN), without boom foot, without rear counterweight, without carbody counterweight and crawler side frames	

Crawler side frame

Weight flat track pads 1000 mm	kg 17498
--------------------------------	----------

Boom foot 7m (No. 2018.23)

Weight including winch	kg 4067
Weight without winch	kg 2685

Boom section 3m (No. 2018.20)

Weight including boom pendants	kg 707
Weight including boom and jib pendants	kg 771

Boom section 6m (No. 2018.20)

Weight including boom pendants	kg 1011
Weight including boom and jib pendants	kg 1121


Boom section 11.7m (No. 2018.20)

Weight including boom pendants	kg 1691
Weight including boom and jib pendants	kg 1905

Boom head 7m (No. 2018.20)

Weight including boom pendants	kg 2404
--------------------------------	---------


Transport option 2018.xx / 1309.xx

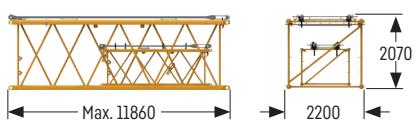

Transport option (No. 2018.xx/1309.xx)

No. 2018.xx/1309.xx	m 6 / 6	11.7 / 11.7
Weight including pendants	kg 1620	2860

Fixed jib 1008.xx

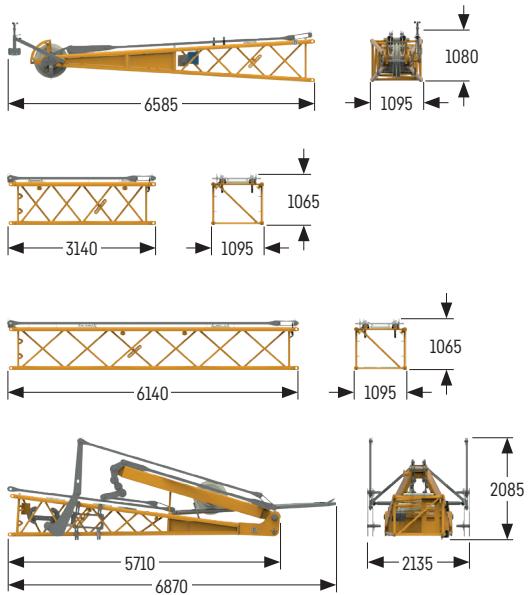

Jib head 5.5 m (No. 1008.20)

Weight including pendents kg 873

Jib section 3 m (No. 1008.17)

Weight including pendents kg 267


Jib section 6 m (No. 1008.17)

Weight including pendents kg 448

Jib foot 5.5 m with A-frame (No. 1008.20)

Weight including pendents kg 2058

Fixed jib 0806.xx

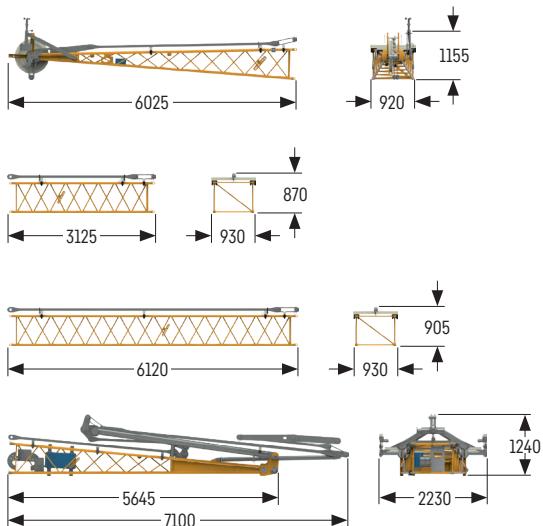

Jib head 5.5 m (No. 0806.16)

Weight including pendents kg 442

Jib section 3 m (No. 0806.15)

Weight including pendents kg 141


Jib section 6 m (No. 0806.15)

Weight including pendents kg 249

Jib foot 5.5 m with A-frame (No. 0806.16)

Weight including pendents kg 1077

Luffing jib 1309.xx

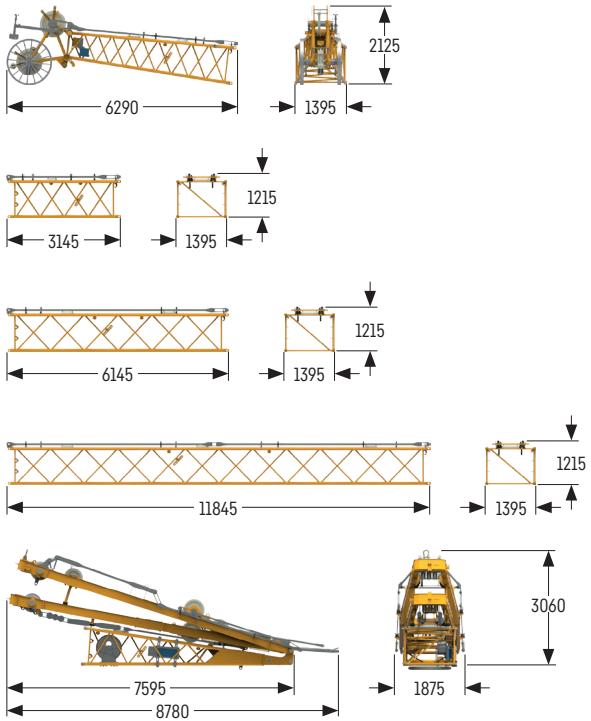

Jib head 5.5 m (No. 1309.22)

Weight including pendents kg 1127

Jib section 3 m (No. 1309.20)

Weight including pendents kg 307

Jib section 6 m (No. 1309.20)

Weight including pendents kg 511


Jib section 11.7 m (No. 1309.20)

Weight including pendents kg 941

Jib foot 5.5 m with A-frames 2 + 3 (No. 1309.22)

Weight including pendents kg 4493

Luffing jib 1713.xx

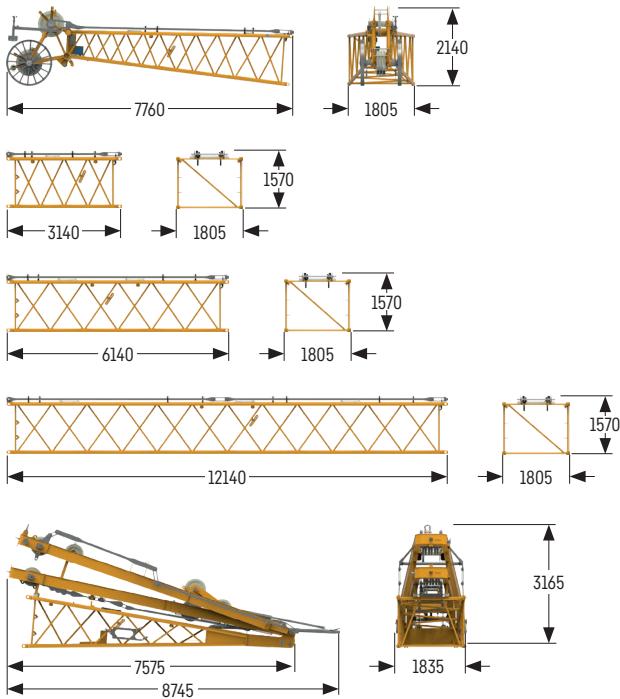

Jib head 7 m (No. 1713.21)

Weight including pendents kg 1376

Jib section 3 m (No. 1713.18)

Weight including pendents kg 394

Jib section 6 m (No. 1713.18)

Weight including pendents kg 624


Jib section 12 m (No. 1713.18)

Weight including pendents kg 1122

Jib foot 7 m with A-frames 2 + 3 (No. 1713.22)


Weight including pendents kg 4747

Counterweight

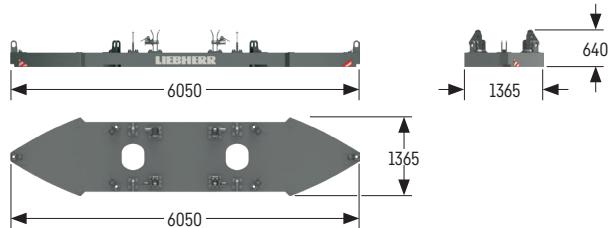


Basic counterweight slab without tie-down (1x)

Weight kg 12000

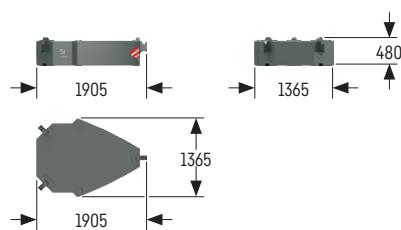

Counterweight slab (8x)


Weight kg 5000

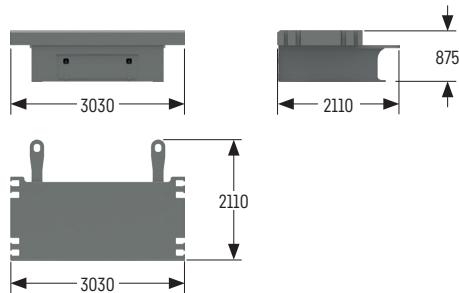

Carbody counterweight (2x)


Weight kg 10000

Pulley block with additional weights / load hooks




160t pulley block – 7 pulleys

Width	mm 885
Weight	kg 1500/2250/3000




100t pulley block – 5 pulleys

Width	mm 745
Weight	kg 1300/1800/2300




80t pulley block – 3 pulleys

Width	mm 565
Weight	kg 1000/1500/2000



40t pulley block – 1 pulley


Width	mm 490
Weight	kg 700/1100/1500




12.5t load hook

Weight	kg 600
--------	--------


Self-assembly system

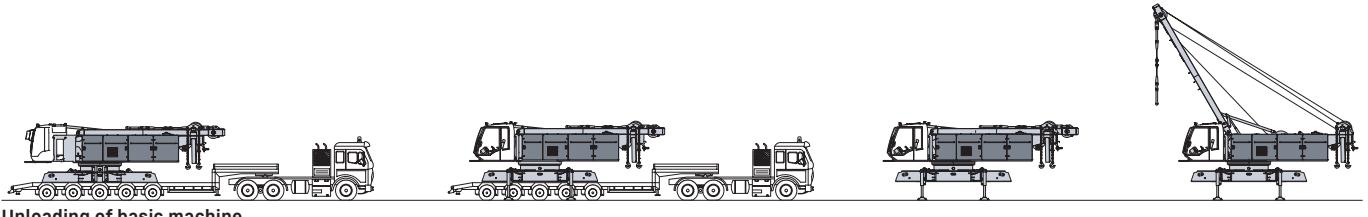


Unloading of basic machine

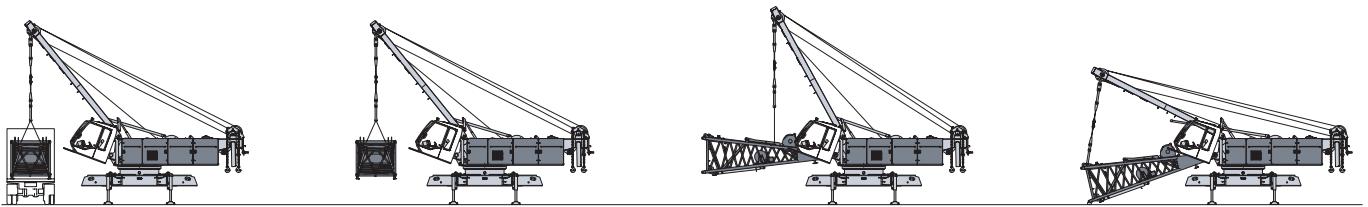

Unloading and assembly of boom foot

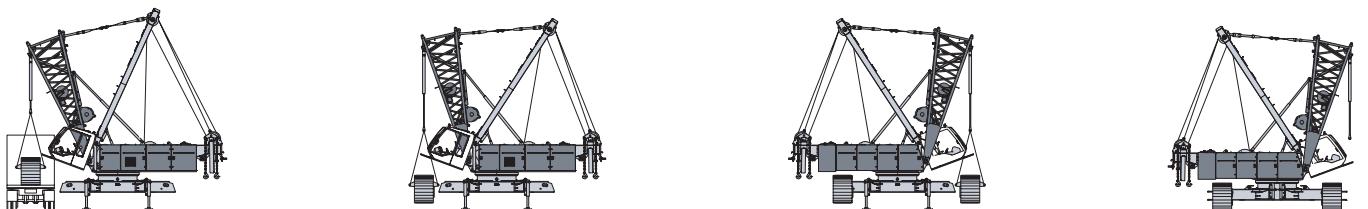


Unloading and assembly of crawler side frames

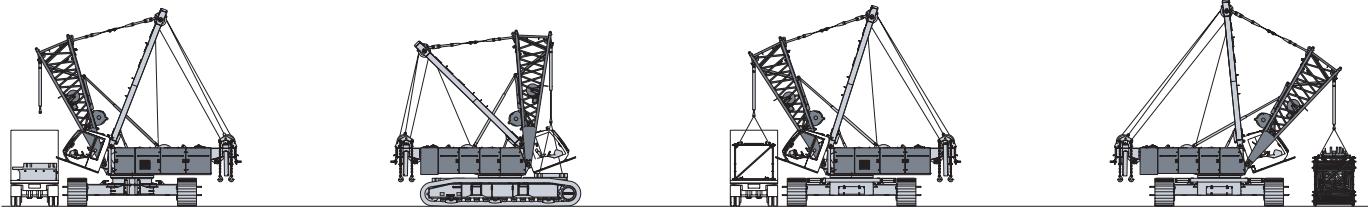


Unloading and assembly of carbody counterweight

Unloading and assembly of boom

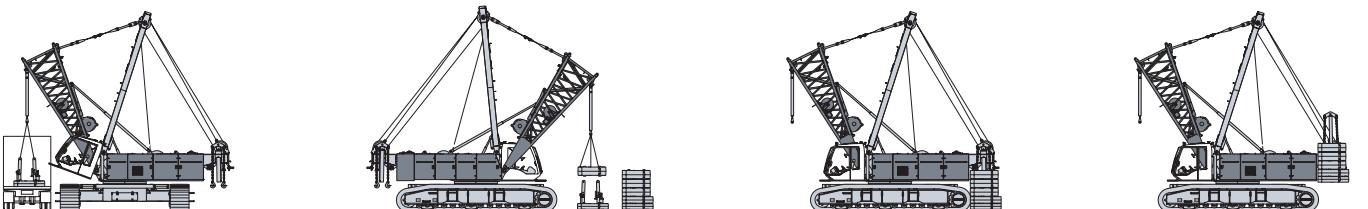


Unloading and assembly of rear counterweight

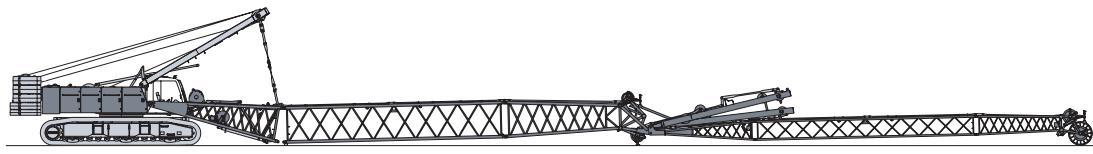

Assembly of boom




Reeving of hoist and luffing jib ropes

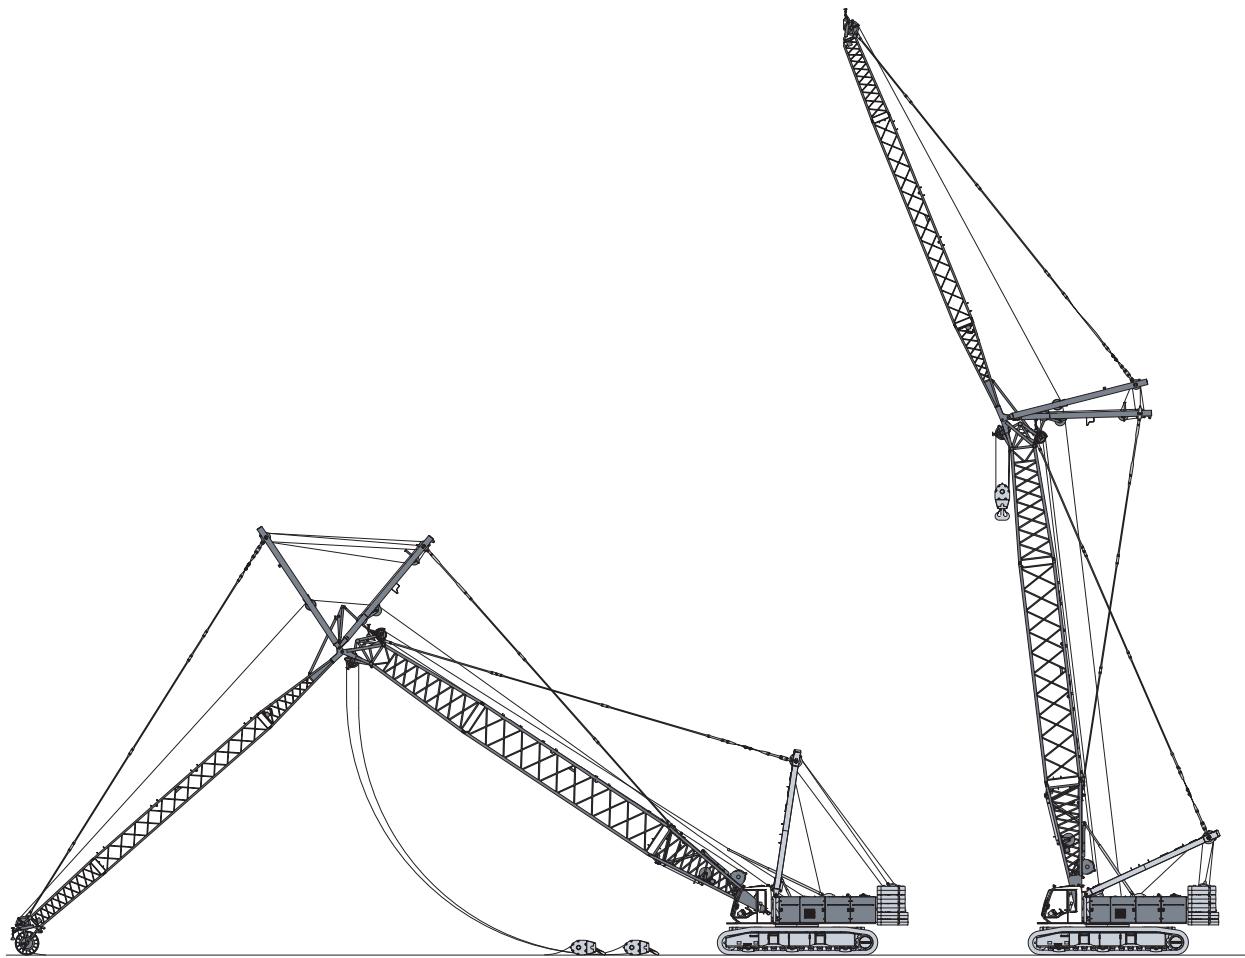

Erecting of main boom and luffing jib

Boom combinations

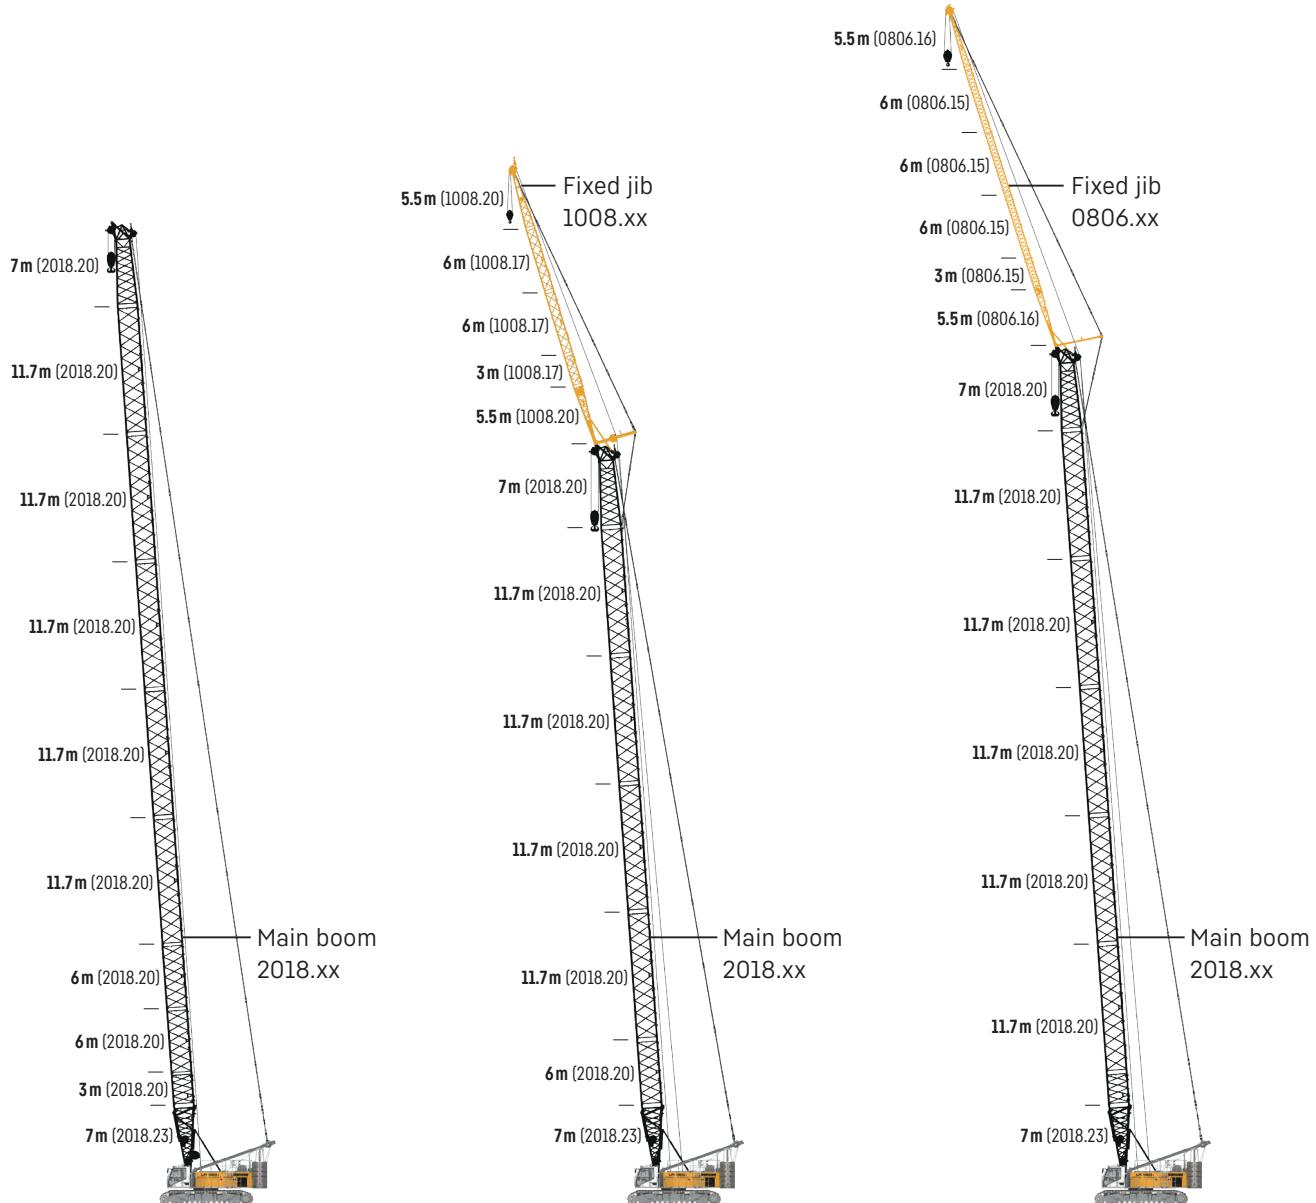

Main boom

Mode 1

Max. length

2018.xx	m 87.5
---------	--------

Further information on page 18.

Main boom + fixed jib

Mode 3

Max. combination

2018.xx	m 66.8	69.8
---------	--------	------

1008.xx	m 26	20
---------	------	----

Total length	m 92.8	89.8
--------------	--------	------

Further information on page 30.

Main boom + fixed jib

Mode 3


Max. combination

2018.xx	m 75.5	78.5
---------	--------	------

0806.xx	m 32	26
---------	------	----

Total length	m 107.5	104.5
--------------	---------	-------

Further information on page 33.

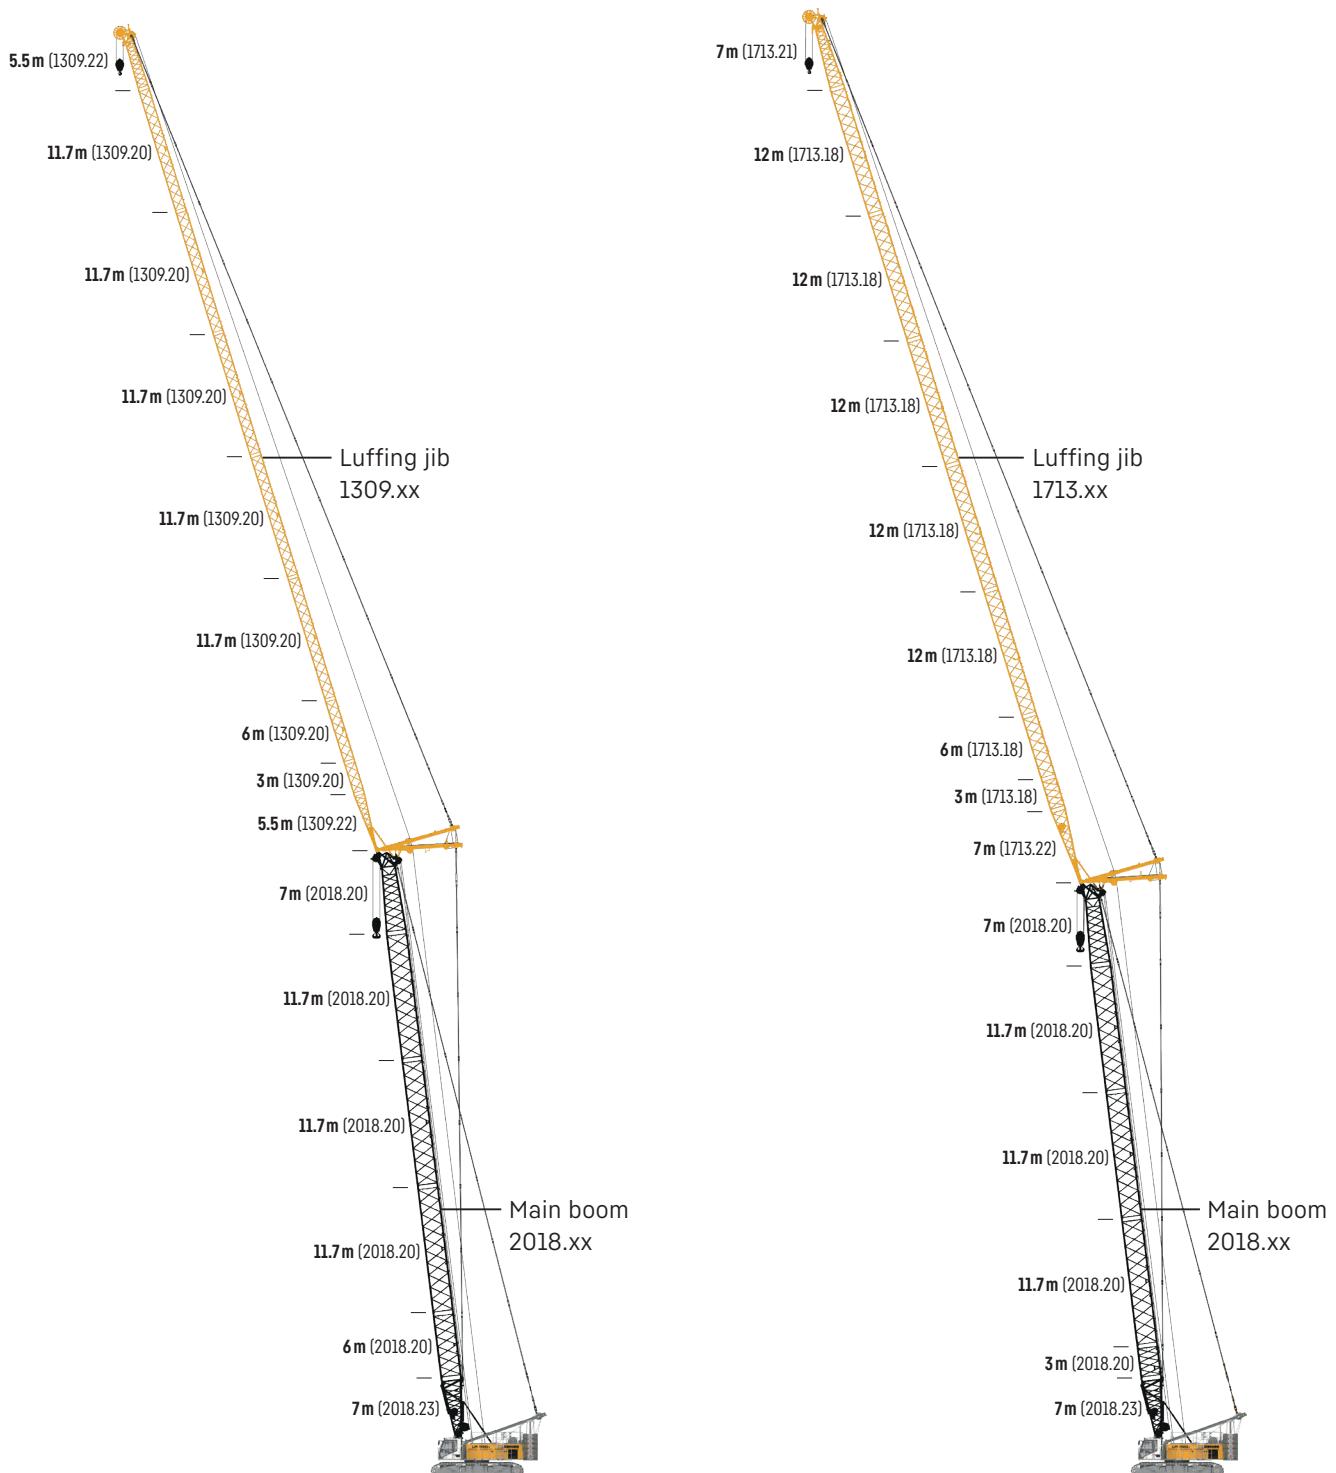

Main boom + luffing jib

Mode 4

Max. combination

2018.xx	m 55.1	58.1
1309.xx	m 78.5	66.8
Total length	m 133.6	124.9

Further information on page 20.

Main boom + luffing jib

Mode 4


Max. combination

2018.xx	m 52.1	55.1
1713.xx	m 83	68
Total length	m 135.1	123.1

Further information on page 25.

Main boom 2018.xx

Boom lengths 20-87.5 m

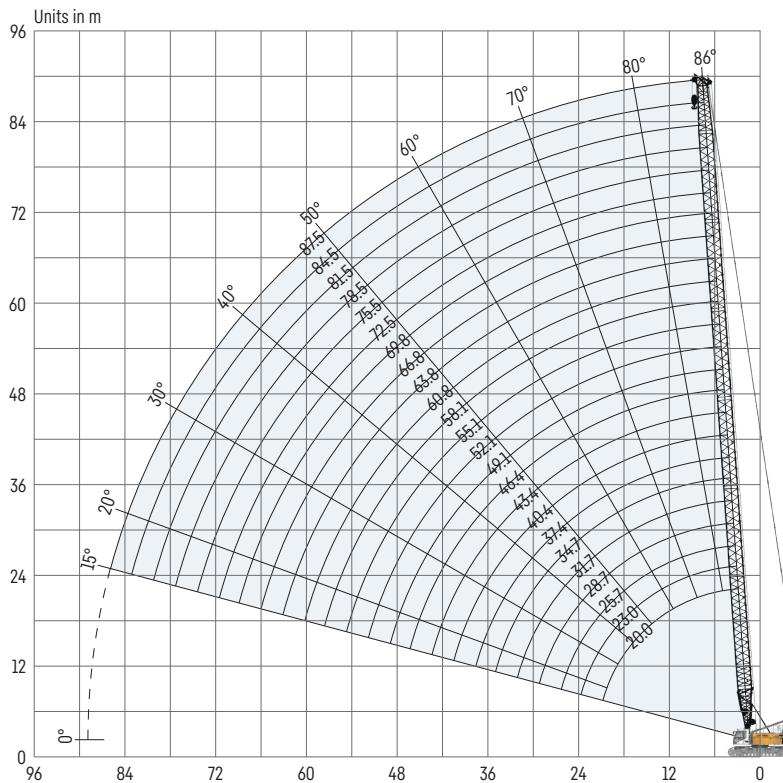

Auxiliary jib 36 t (option)

The maximum capacity of the auxiliary jib is 36 t. The corresponding load chart is programmed in the LML system.

Main boom configuration 2018.xx

Boom section	Amount of boom sections											
Boom foot 7m	1	1	1	1	1	1	1	1	1	1	1	1
Boom section 3m		1		1		1		1		1		1
Boom section 6m	1	1			1	1			1	1		
Boom section 11.7m			1	1	1	1	2	2	2	2	3	3
Boom head 7m	1	1	1	1	1	1	1	1	1	1	1	1
Boom length [m]	20	23	25.7	28.7	31.7	34.7	37.4	40.4	43.4	46.4	49.1	52.1
Auxiliary jib	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Boom foot 7m	1	1	1	1	1	1	1	1	1	1	1	1
Boom section 3m		1		1		1		1		1		1
Boom section 6m	1	1			1	1			1	1	2	2
Boom section 11.7m	3	3	4	4	4	4	5	5	5	5	5	5
Boom head 7m	1	1	1	1	1	1	1	1	1	1	1	1
Boom length [m]	55.1	58.1	60.8	63.8	66.8	69.8	72.5	75.5	78.5	81.5	84.5	87.5
Auxiliary jib	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Load capacities with main boom

Load capacities in [t] with 62.3 t rear counterweight and 20 t carbody counterweight

Radius [m]	Boom length [m]											
	20	28.7	34.7	40.4	46.4	52.1	58.1	63.8	69.8	75.5	81.5	87.5
5	160.0*	136.3	126.4									
6	137.0	131.2	122.9	104.8	86.4							
7	122.6	115.1	111.0	98.9	82.7	69.5	58.0	46.7				
8	111.6	102.0	95.8	89.4	78.9	66.4	56.0	46.3	37.9	31.6		
9	97.0	89.0	84.2	79.7	72.1	63.7	53.8	44.5	36.8	31.3	26.0	21.9
10	84.9	78.9	75.0	71.5	66.5	59.9	51.5	43.3	35.7	30.4	25.3	21.7
11	73.8	70.8	67.5	64.6	61.7	56.7	48.9	41.1	34.8	29.7	24.6	21.0
12	65.2	64.2	61.3	58.9	56.4	54.2	46.7	39.0	33.4	28.9	24.1	20.5
13	58.3	58.3	56.1	54.0	51.8	49.8	44.9	37.2	32.3	28.1	23.4	20.1
14	52.6	52.6	51.7	49.8	47.8	46.1	42.7	35.8	31.2	27.3	22.7	19.4
16	43.9	43.9	43.8	43.0	41.4	40.0	37.7	32.6	29.4	26.1	21.4	18.1
18	37.5	37.5	37.3	37.2	36.4	35.2	33.8	29.5	27.0	24.7	20.5	17.1
20	32.5	32.6	32.4	32.3	32.0	31.3	30.1	27.2	25.0	23.3	19.3	16.2
22		28.7	28.6	28.4	28.1	27.9	27.0	25.2	23.4	22.1	18.3	15.3
24		25.6	25.4	25.3	25.0	24.8	24.4	23.3	21.9	21.1	17.4	14.5
26		23.0	22.8	22.7	22.4	22.2	21.9	21.4	20.4	19.8	16.7	13.9
28		20.7	20.6	20.5	20.2	20.0	19.7	19.4	18.8	18.1	15.8	13.3
30			18.7	18.6	18.3	18.1	17.8	17.6	17.2	16.5	14.9	12.7
32			17.1	17.0	16.7	16.5	16.2	15.9	15.6	15.2	14.0	12.2
34			15.7	15.6	15.3	15.1	14.8	14.5	14.2	13.9	13.2	11.6
36				14.3	14.1	13.9	13.5	13.3	13.0	12.7	12.1	11.2
38				13.2	13.0	12.8	12.4	12.2	11.9	11.6	11.2	10.4
40					12.2	12.0	11.8	11.5	11.3	10.9	10.7	10.3
42						11.1	10.9	10.6	10.4	10.1	9.8	9.4
44						10.3	10.1	9.8	9.6	9.3	9.0	8.6
46						9.6	9.4	9.1	8.8	8.5	8.2	7.4
48							8.7	8.4	8.2	7.9	7.6	7.2
50							8.1	7.8	7.6	7.3	7.0	6.6
55								6.5	6.3	5.9	5.7	5.3
60									5.1	4.8	4.6	4.2
65										3.9	3.6	3.3
70										2.8	2.5	2.2
75										2.1		

* Load capacities over 137t require a special heavy duty boom head.

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.





www.liebherr.com/CranePlanner

 **Crane Planner 2.0**

Luffing jib 1309.xx

Jib lengths 22.7-78.5 m

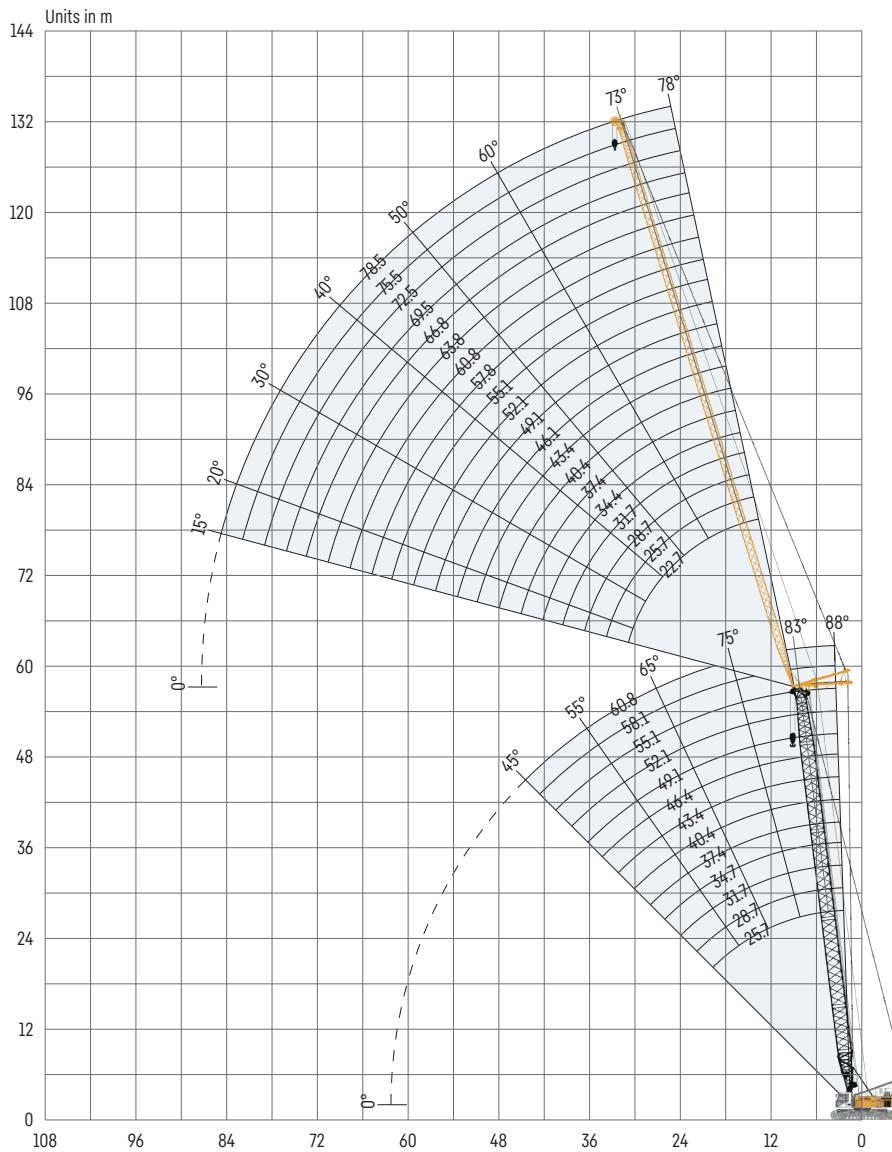

Auxiliary jib 12t (option)

The maximum capacity of the auxiliary jib is 12t.

Jib configuration 1309.xx

Jib section	Amount of jib sections																			
Jib foot 5.5m	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Jib section 3 m		1		1		1		1		1		1		1		1		1		1
Jib section 6 m			1	1				1	1			1	1			1	1			1
Jib section 11.7 m	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	
Jib head 5.5m	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Jib length [m]	22.7	25.7	28.7	31.7	34.4	37.4	40.4	43.4	46.1	49.1	52.1	55.1	57.8	60.8	63.8	66.8	69.5	72.5	75.5	78.5
Auxiliary jib	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	

For main boom configuration please refer to the table on page 18.

Load capacities with luffing jib

Load capacities in [t] with 25.7 m main boom 88°

Radius [m]	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	78.5
8.6	22.7	47.4				
13	37.6	20.8				
16	28.6	19.3	10.7			
18	24.1	18.5	10.2	7.8		
20	20.5	16.8	9.8	7.4	5.2	
22	17.6	15.4	9.3	7.2	5.0	3.6
26		12.6	8.7	6.7	4.7	3.3
36		8.6	7.2	5.9	4.1	2.7
44			5.7	5.3	3.6	2.4
55			4.1	3.6	2.8	2.0
60				3.1	2.3	
65				2.5		

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 40.4 m main boom 88°

Radius [m]	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	78.5
9.1	22.7	37.3				
13	37.6	29.8	17.5			
16	28.6	23.6	16.6	9.6		
18	24.1	20.3	15.9	9.4	7.0	
20	20.5	17.8	14.4	9.0	6.8	4.8
22	17.6	15.6	12.7	8.6	6.6	4.7
28			9.8	7.8	6.0	4.3
42			6.4	5.2	4.5	3.5
44				4.9	4.3	3.3
55				3.6	3.0	2.4
60					2.6	
65					2.1	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 55.1 m main boom 88°

Radius [m]	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	78.5
9.6	22.7	26.2				
14	20.7	14.0				
18	16.0	12.4	8.1			
20	14.4	11.6	7.8	5.9	3.8	
22	12.9	10.3	7.5	5.7	3.7	3.0
24	11.9	9.3	7.3	5.6	3.6	2.9
26	11.0	8.6	6.9	5.4	3.5	2.8
28		7.9	6.4	5.3	3.4	2.7
38		6.0	4.7	4.1	3.0	2.3
44			4.0	3.3	2.5	2.0
46			3.7	3.1	2.3	
55			2.9	2.3		

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 58.1 m main boom 88°

Radius [m]	Jib length [m]					
	22.7	34.4	40.4	52.1	60.8	66.8
9.7	22.7	24.2				
13	20.7	20.9	15.8			
14	19.0		15.5	13.0		
16	17.3	14.3	12.5	8.5		
18	15.2	12.9	11.7	8.3	5.9	
20	13.6	11.7	10.9	8.1	5.7	4.7
26	10.3	8.8	8.2	6.9	5.1	4.2
28		8.2	7.6	6.4	5.0	4.1
40			5.5	4.4	3.7	3.2
42			5.2	4.2	3.5	3.0
44				4.0	3.3	2.8
55				2.9	2.3	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 60.8 m main boom 88°

Radius [m]	Jib length [m]					
	22.7	28.7	34.4	40.4	46.1	49.1
9.8	22.7					
12	20.5	18.0				
13	19.5	17.4	15.2			
14	18.3	16.4	14.7	11.0		
16	16.4	14.8	13.4	10.4	9.0	8.2
26	10.2	9.2	8.5	7.6	7.0	6.5
28		8.7	7.9	7.1	6.6	6.2
34			6.7	5.9	5.5	5.1
40				5.1	4.6	4.3
46					3.9	3.7
48					3.8	3.5
50						3.3

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with luffing jib

Load capacities in [t] with 25.7 m main boom 83°

	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	78.5
12.8	22.7	44.1				
18	32.4	18.9				
24	19.2	16.5	9.3			
26	17.1	15.7	9.0	6.8		
28	12.1	14.6	8.7	6.6	4.7	
30		13.8	8.5	6.5	4.5	3.2
40		9.6	7.4	5.8	4.0	2.7
46			6.7	5.4	3.6	2.4
55			5.4	4.8	3.2	2.1
60				4.3	2.9	2.0
65				3.6	2.7	
70					2.2	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 40.4 m main boom 83°

	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	78.5
14.6	22.7	33.7				
20	24.6	15.8				
26	16.5	13.9	8.4			
28	15.1	13.1	8.2	6.2		
30		12.1	8.0	6.1	4.3	
32		11.4	7.8	6.0	4.3	3.0
46		7.2	6.3	5.1	3.5	2.4
48			6.0	5.0	3.4	2.3
50			5.7	4.8	3.3	2.2
60			4.2	3.8	2.8	
65				3.2	2.5	
70					2.2	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 55.1 m main boom 83°

	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	78.5
16.4	22.7	21.3				
22	16.7	12.0				
26	14.0	10.8	7.3			
30	12.1	9.8	7.1	5.4		
32		9.1	6.9	5.3	3.5	
34		8.6	6.7	5.2	3.4	2.7
48		5.9	4.9	4.2	2.8	2.1
50			4.6	4.1	2.8	2.1
55			4.0	3.4	2.6	
60			3.5	2.9	2.1	
65				2.5		
70				2.1		

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 58.1 m main boom 83°

	Jib length [m]					
	22.7	40.4	52.1	57.8	60.8	66.8
16.7	22.7	19.2				
22	15.6	10.9				
26	13.4	10.0	7.5			
28	12.4	9.5	7.4	6.4	5.4	
30	11.6	9.1	7.2	6.3	5.4	4.3
36		7.8	6.5	5.7	4.9	4.1
38		7.3	6.1	5.5	4.8	3.9
44		6.3	5.3	4.8	4.3	3.6
48		5.6	4.7	4.4	4.0	3.4
50			4.5	4.1	3.8	3.3
60			3.4	3.1	2.7	2.4
65					2.6	2.2

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 60.8 m main boom 83°

	Jib length [m]					
	22.7	28.7	34.4	40.4	46.1	49.1
17.1	22.7	17.6				
20	15.7	13.9				
22	14.6	12.8	11.7			
24	13.5	12.0	11.0	9.2	7.8	
26	12.7	11.3	10.3	8.7	7.8	7.2
34		9.1	8.4	7.4	6.7	6.3
38		8.1	7.6	6.7	6.2	5.8
40			7.2	6.3	5.9	5.6
44				5.7	5.3	5.0
48				5.1	4.7	4.5
50					4.5	4.2
55						3.7

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

 **Crane Planner 2.0**

Load capacities with luffing jib

Load capacities in [t] with 25.7 m main boom 75°

	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	78.5
19.2	22.7	24.0				
28	21.8	16.7				
34		14.1	8.4			
38		12.4	8.0	6.1		
40		11.6	7.8	6.0		
42		10.9	7.6	5.8	4.0	
44		10.3	7.5	5.7	3.9	2.6
50			6.8	5.4	3.6	2.4
55			6.3	5.1	3.4	2.2
65				4.5	2.9	
70				4.0	2.7	
75					2.4	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 40.4 m main boom 75°

	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	78.5
23.1	22.7	24.7				
32	17.6	14.1				
40		11.9	7.6			
42		11.3	7.5	5.6		
46		10.2	7.2	5.4	3.7	
48		9.7	7.1	5.3	3.6	2.4
50		9.1	6.9	5.2	3.6	2.4
55			6.5	5.0	3.3	2.2
65			5.4	4.5	2.9	
70				4.2	2.7	
75				3.8	2.5	
80					2.3	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 55.1 m main boom 75°

	Jib length [m]					
	22.7	40.4	55.1	63.8	66.8	72.5
26.9	22.7	15.1				
36	12.4	9.2				
38	12.1	8.8				
42		8.2	6.1			
46		7.6	5.8	4.5	4.0	
48		7.4	5.7	4.4	4.0	2.9
55		6.7	5.1	4.1	3.7	2.8
60			4.7	3.9	3.5	2.7
65			4.4	3.6	3.2	2.5
70			4.0	3.3	3.0	2.3
75				3.0	2.7	2.0
80					2.4	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 58.1 m main boom 75°

	Jib length [m]					
	22.7	40.4	46.1	55.1	63.8	66.8
27.6	22.7	13.4				
36	11.2	8.2				
38	10.9	7.9	7.0			
40		7.6	6.9			
42		7.3	6.7	5.4		
46		6.8	6.2	5.2	3.8	
48		6.6	6.0	5.0	3.7	3.4
55		6.0	5.4	4.5	3.5	3.1
60			5.0	4.1	3.2	2.9
65				3.9	2.9	2.6
75					2.5	2.2
80						2.0

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 60.8 m main boom 75°

	Jib length [m]					
	22.7	31.7	40.4	43.4	46.1	49.1
28.3	22.7	12.1				
34	10.7	9.1				
36	10.2	8.7	6.9			
38	9.9	8.3	6.8	6.3		
40	9.7	8.0	6.6	6.2	5.9	5.4
42		7.7	6.3	6.0	5.7	5.3
46		7.2	5.9	5.6	5.3	5.0
48		7.0	5.7	5.4	5.2	4.8
50			5.5	5.2	5.0	4.7
55			5.2	4.8	4.6	4.3
60				4.6	4.3	4.0
65						3.8

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

 **Crane Planner 2.0**

Load capacities with luffing jib

Load capacities in [t] with 25.7 m main boom 65°

Radius [m]	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	78.5
26.8	21.8					
38		13.5				
46		10.7	7.5			
48		10.1	7.4			
50		9.5	7.2			
55			6.7	5.3		
60			6.2	5.1	3.3	2.2
65			5.6	4.9	3.1	2.0
70				4.5	2.9	
75				4.0	2.7	
80					2.5	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 40.4 m main boom 65°

Radius [m]	Jib length [m]					
	22.7	40.4	55.1	63.8	72.5	75.5
33		15.1				
42		11.2				
44			9.9			
50			8.3			
55			7.3	6.6		
60				5.8	4.9	
65				5.1	4.7	3.1
70				4.5	4.2	2.9
75					3.6	2.7
80					3.2	2.6
85						2.4
90						2.1

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 52.1 m main boom 65°

Radius [m]	Jib length [m]					
	22.7	31.7	43.4	57.8	63.8	69.5
38	11.2					
42	9.9					
44	9.3	8.8				
46	8.8	8.3				
48		7.9				
50		7.5	6.7			
55		6.5	5.9			
60			5.3	4.3		
65			4.6	3.8	3.4	3.1
70				3.4	3.0	2.6
75				2.9	2.6	2.2
80				2.6	2.2	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 55.1 m main boom 65°

Radius [m]	Jib length [m]					
	22.7	34.4	37.4	46.1	57.8	60.8
39.3	10.2					
40	10.0					
44	9.0					
46	8.5	7.7				
48	8.0	7.3	7.0			
50		6.9	6.7			
55		5.9	5.4			
60		6.2	5.3	4.7	4.0	
65				4.2	3.5	3.2
70				3.7	3.0	2.8
75					2.6	2.4
80					2.3	2.1

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 58.1 m main boom 65°

Radius [m]	Jib length [m]					
	22.7	28.7	34.4	46.1	55.1	60.8
40.5	9.3					
42	8.9					
44	8.5	8.0				
46	8.0	7.6				
48	7.7	7.2	6.8			
50		6.9	6.5			
55		6.1	5.7	4.9		
60			5.1	4.3	3.7	
65				3.8	3.2	2.9
70				3.4	2.8	2.5
75					2.4	2.1
80						

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.





www.liebherr.com/CranePlanner

 **Crane Planner 2.0**

Luffing jib 1713.xx

Jib lengths 20-83 m

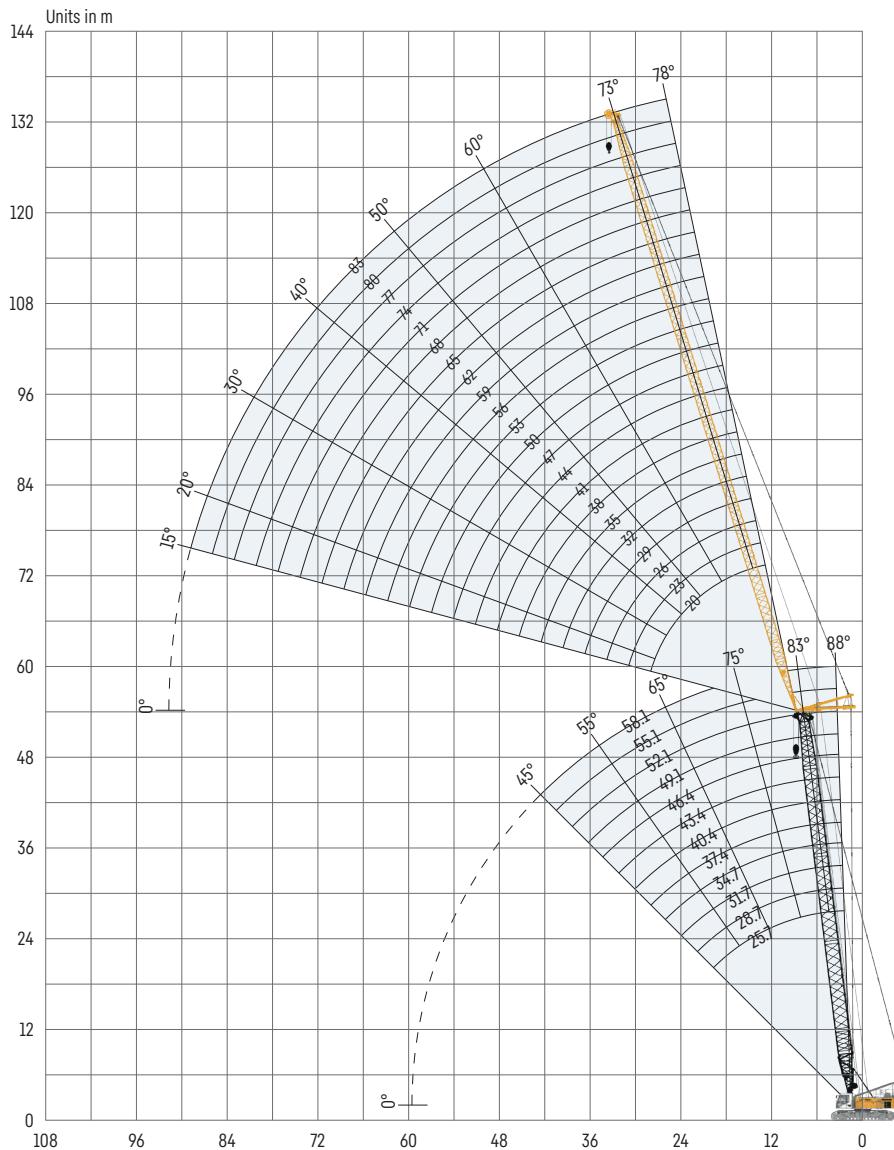

Auxiliary jib 12 t (option)

The maximum capacity of the auxiliary jib is 12 t.

Jib configuration 1713.xx

Jib section	Amount of jib sections																		
	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Jib foot 7m	1																		
Jib section 3m		1		1		1		1		1		1		1		1		1	
Jib section 6m	1	1			1	1			1	1			1	1			1	1	
Jib section 12m			1	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	5
Jib head 7m	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Jib length [m]	20	23	26	29	32	35	38	41	44	47	50	53	56	59	62	65	68	71	74
Auxiliary jib	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

For main boom configuration please refer to the table on page 18.

Load capacities with luffing jib

Load capacities in [t] with 25.7 m main boom 88°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
8	59.2					
12	41.8	34.8				
14	34.3	31.1	22.7			
18	24.1	21.9	19.9	14.5		
20	20.4	18.6	17.6	13.9	9.6	
22	17.1	16.2	15.4	12.7	9.1	6.5
24		14.3	13.3	11.7	8.8	6.3
32		9.7	9.0	7.8	7.0	5.5
38			7.0	5.9	5.3	4.5
46			5.2	4.2	3.6	3.1
50				3.5	3.0	2.3
55				2.9	2.2	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 37.4 m main boom 88°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
8.4	47.2					
12	35.2	28.4				
16	25.2	21.6	18.4			
18	21.7	18.5	16.9	12.5		
20	18.6	16.0	14.4	12.0	8.4	
22	16.3	14.0	12.6	11.0	8.1	5.6
24		12.3	11.1	9.7	7.9	5.5
40			5.9	4.8	4.0	3.2
48			4.8	3.4	2.7	
50				3.1	2.4	
55				2.6		
60				2.0		

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 43.4 m main boom 88°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
8.6	40.2					
12	31.5	24.9				
16	22.5	19.5	16.5			
18	19.7	17.0	15.0	11.4		
20	17.3	14.8	12.9	10.9	7.7	
22	15.2	13.2	11.5	10.0	7.5	5.1
34		7.7	6.5	5.6	4.7	3.9
40			5.2	4.4	3.6	2.7
44			4.6	3.8	2.9	2.2
46			4.3	3.4	2.6	
50				2.9	2.2	
55				2.4		

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 52.1 m main boom 88°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
8.9	31.3					
13	24.1	19.5				
14	22.5	18.6				
16	19.4	16.3	13.6			
18	17.0	14.4	12.5	9.7		
20	14.9	12.6	10.9	9.1	5.6	
24	11.7	10.0	8.7	7.4	5.4	3.3
26		9.1	7.9	6.8	5.0	3.3
34		6.8	5.8	4.8	3.5	2.6
40			4.7	3.8	2.7	
46				3.9	3.0	
55				2.1		

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 58.1 m main boom 88°

Radius [m]	Jib length [m]					
	20	29	35	41	47	50
9.1	26.3					
12	22.9	19.5				
13	21.2	18.7	16.6			
14	19.9	17.5	15.9	14.0		
16	17.4	15.4	14.2	13.0	10.4	9.7
26		8.9	8.2	7.6	6.7	6.5
34			6.2	5.7	5.0	4.7
40				4.7	4.1	3.9
42				4.5	3.8	3.6
44				4.0	3.6	3.4
48					3.2	3.0
50					2.8	2.8

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

 **Crane Planner 2.0**

Load capacities with luffing jib

Load capacities in [t] with 25.7 m main boom 83°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
12	51.7					
18	31.5	29.3				
20	26.3	26.0	20.2			
24	19.0	19.9	18.5	12.9		
26		17.3	16.6	12.6		
28		15.4	15.2	12.2	8.5	
32		12.5	12.3	11.1	8.1	5.7
38		9.6	9.3	8.9	7.4	5.0
48			6.1	5.6	5.4	4.3
55				4.0	3.9	3.4
60				3.2	2.9	2.8
65					2.1	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 37.4 m main boom 83°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
13.4	40.7					
18	29.9	24.9				
22	21.6	20.3	16.4			
24	18.7	17.7	15.7			
26	16.5	15.7	14.8	10.9		
28		14.0	13.3	10.7		
30		12.8	12.3	10.5	7.5	
40		8.5	7.8	7.3	6.6	4.7
42			7.2	6.7	6.4	4.5
50			5.4	4.7	4.3	3.7
55				3.8	3.4	2.8
60					3.1	2.6

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 43.4 m main boom 83°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
14.1	34.0					
20	23.6	20.2				
22	20.2	18.4				
24	17.7	16.3	13.9			
26	16.0	14.7	13.0	10.2		
30		12.0	11.1	9.5	7.0	
34		10.2	9.3	8.4	6.7	4.6
42		7.1	6.8	6.1	5.7	4.2
48			5.5	4.8	4.3	3.8
55				3.6	3.0	2.5
60				2.9	2.3	
65				2.2		

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 52.1 m main boom 83°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
15.2	25.5					
20	20.1	15.8				
24	15.8	13.5	11.0			
28	12.9	11.4	9.8	7.9		
30		10.4	9.2	7.6		
32		9.6	8.8	7.3	4.9	
42		6.7	6.0	5.2	3.8	2.6
46			5.2	4.5	3.3	2.3
50			4.6	3.8	2.8	2.0
55				3.1	2.2	
60				2.6		
65				2.0		

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 58.1 m main boom 83°

Radius [m]	Jib length [m]					
	20	29	35	41	47	50
15.9	20.7					
20	17.3	14.8				
22	15.9	13.5	12.2			
24	14.5	12.6	11.3	10.3	8.2	
26	13.1	11.6	10.6	9.7	8.0	7.5
30		9.9	9.2	8.6	7.2	6.9
38		7.4	7.0	6.6	5.8	5.6
40			6.6	6.1	5.5	5.3
42			6.2	5.7	5.1	5.0
48				4.8	4.2	4.0
50					3.9	3.7
55					3.2	3.2

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

 **Crane Planner 2.0**

Load capacities with luffing jib

Load capacities in [t] with 25.7 m main boom 75°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
18.1	24.0					
26	23.7	23.0				
30		18.3	16.6			
36		13.8	12.7	11.5		
40		11.9	11.1	9.9	7.6	
44			9.3	8.3	7.1	
46			8.7	7.7	6.8	4.9
55			5.9	5.6	5.0	4.3
60				4.8	4.2	3.5
65				3.9	3.5	2.9
70					2.9	2.4
75					2.2	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 37.4 m main boom 75°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
21.1	24.0					
28	20.7	19.2				
32	12.1	16.6				
34		15.4	14.2			
36		14.5	13.2			
38		13.5	12.3	10.3		
44		10.8	10.2	9.2	6.8	
48			8.8	7.9	6.6	4.4
60				5.3	4.6	3.7
65				4.4	3.9	3.2
70					3.3	2.7
75					2.6	2.1

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 43.4 m main boom 75°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
22.7	24.5					
30	18.5	16.1				
36		13.6	11.5			
38		12.8	10.9			
40		12.1	10.5	8.6		
42		11.4	9.9	8.5		
46		9.8	9.0	7.8	6.0	
50			8.0	7.1	5.7	3.9
60				5.4	4.7	3.5
65				4.5	4.0	3.1
70				3.5	3.3	2.7
75					2.7	2.2

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 52.1 m main boom 75°

Radius [m]	Jib length [m]					
	20	35	47	59	71	74
24.9	17.4					
32	14.5	11.5				
34	13.9	11.0				
36		10.5				
38		10.0	8.4			
40		9.6	8.0			
42		9.1	7.7	6.2		
48		8.0	6.8	5.6	3.7	3.3
55			5.9	4.8	3.2	2.9
60			5.1	4.3	2.8	2.6
65				3.9	2.5	2.3
70				3.2	2.2	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 58.1 m main boom 75°

Radius [m]	Jib length [m]					
	20	29	35	41	47	50
26.5	14.1					
32	12.2	10.2				
34	11.6	9.7	8.9			
36	11.3	9.3	8.5	7.7		
38		8.9	8.1	7.4	5.9	
40		8.5	7.8	7.1	5.8	5.5
44		8.0	7.1	6.5	5.4	5.1
48			6.7	6.0	5.0	4.7
50			6.5	5.8	4.8	4.5
55				5.3	4.4	4.1
60					4.0	3.8
65						3.5

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with luffing jib

Load capacities in [t] with 25.7 m main boom 65°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
25.3	23.2					
34		15.4				
42		11.7	11.2			
44		11.0	10.5			
46		10.4	9.9			
50			8.8	7.8		
55			7.6	6.5	5.5	
60				5.5	4.8	
65				4.8	4.1	3.5
70				4.2	3.5	2.8
75					3.0	2.3
80					2.6	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 37.4 m main boom 65°

Radius [m]	Jib length [m]					
	20	35	47	59	71	83
30.2	17					
38	12.1					
40		11.2				
46		9.3	8.7			
50		8.3	7.7			
55			6.7	6.1		
60			5.9	5.3	4.5	
65				4.6	3.9	
70				4	3.3	2.5
75				3.5	2.9	2.1
80					2.5	
85					2.1	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 43.4 m main boom 65°

Radius [m]	Jib length [m]					
	20	35	47	59	71	74
32.8	14.5					
34	13.9					
40	11.3					
42		9.8				
44		9.2				
48		8.2				
50		7.7	7.0			
55		6.7	6.1			
60			5.3	4.6		
65			4.7	4.0	3.2	3.0
70				3.5	2.7	2.5
75				3.0	2.3	2.1

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 52.1 m main boom 65°

Radius [m]	Jib length [m]					
	20	35	47	53	59	62
36.4	11.3					
38	10.8					
40	10.2					
44	9.0					
46		7.4				
48		7.0				
50		6.7				
55		5.9	5.0			
60			4.3	3.9	3.5	
65			3.8	3.4	3.0	2.8
70			3.3	3.0	2.5	2.4
75				2.6	2.1	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 58.1 m main boom 65°

Radius [m]	Jib length [m]					
	20	29	35	41	47	50
39	9.3					
40	9.1					
42	8.6					
44	8.1					
46	7.7	6.9				
48		6.6	6.0			
50		6.2	5.7			
55		5.5	5.0	4.6	4.1	
60			4.4	4.0	3.5	3.4
65				3.5	3.0	2.9
70					2.6	2.5
75						2.1

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.




www.liebherr.com/CranePlanner

Crane Planner 2.0

Fixed jib 1008.xx

Jib lengths 11-26 m

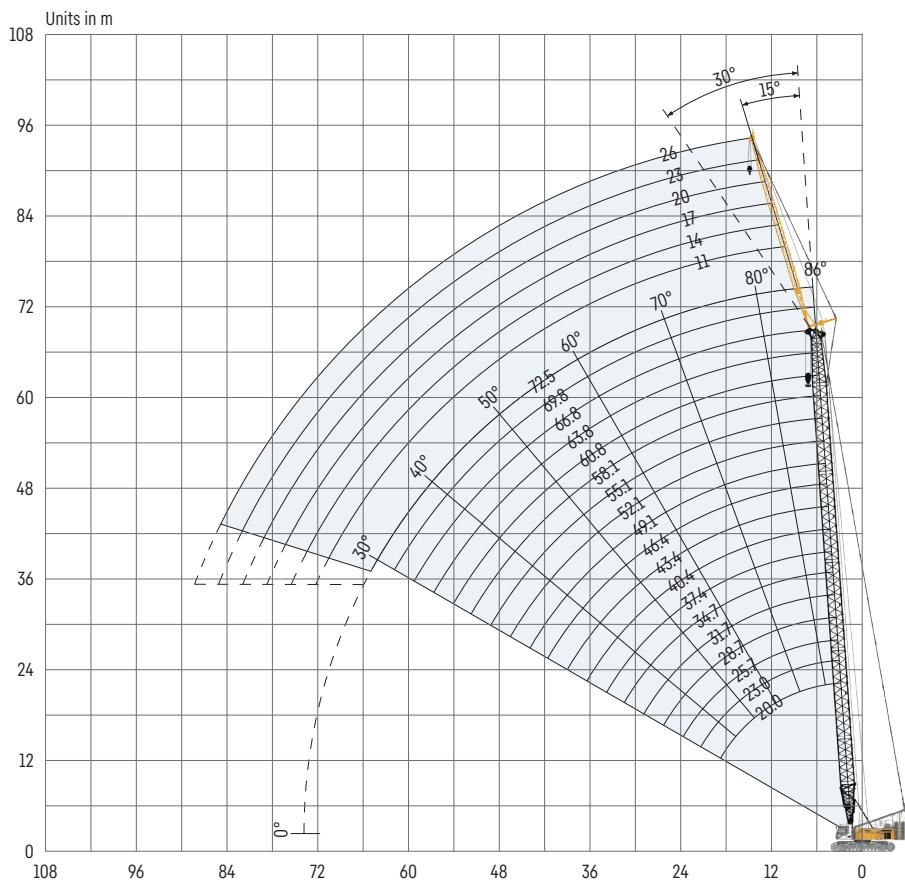

Jib configuration 1008.xx

Jib section	Amount of jib sections					
Jib foot 5.5m	1	1	1	1	1	1
Jib section 3m		1				1
Jib section 6m			1	1	2	2
Jib head 5.5m	1	1	1	1	1	1
Jib length [m]	11	14	17	20	23	26

For main boom configuration please refer to the table on page 18.

Load capacities with fixed jib 15°

Load capacities in [t] with 20 m main boom

	Jib length [m]			
	11	14	20	26
Radius [m]	5.7	35.9		
	7	35.9	35.9	
	10	35.9	33.4	24.5
	12	35.9	29.5	21.9
	16	31.4	24.1	18.0
	20	29.6	22.8	15.0
	24	25.9	21.0	14.3
	28	21.1	18.8	13.6
	30	19.2	18.0	12.9
	32		17.2	12.4
38				10.1
				11.2
44				8.9
				8.0

62.3 t rear counterweight and 20 t carbody counterweight

Load capacities in [t] with 40.4 m main boom

	Jib length [m]			
	11	14	20	26
Radius [m]	6.4	35.9		
	8	35.9	34.5	
	10	35.9	33.7	26.8
	13	35.9	32.4	25.2
	20	30.1	27.5	20.9
	32	16.7	16.8	15.9
	38	12.8	13	13.3
	44	10.1	10.3	10.6
	48	8.7	8.8	9.1
	50		8.2	8.5
55				7.1
				7.3
60				6.1

62.3 t rear counterweight and 20 t carbody counterweight

Load capacities in [t] with 52.1 m main boom

	Jib length [m]			
	11	14	20	26
Radius [m]	6.8	35.9		
	8	35.9	32.5	
	11	35.7	31.8	23.8
	13	34.9	30.5	23.0
	18	31.1	27.2	20.6
	24	23.3	22.4	18.2
	36	13.4	13.6	13.9
	48	8.1	8.3	8.5
	55	6.1	6.3	6.5
	60		5.1	5.4
65				5.6
				4.4
70				4.6
				3.7

62.3 t rear counterweight and 20 t carbody counterweight

Load capacities in [t] with 60.8 m main boom

	Jib length [m]			
	11	14	20	26
Radius [m]	7.1	33.0		
	9	32.2	28.5	
	11	30.9	27.5	20.7
	13	29.3	26.1	20.1
	18	25.9	23.2	18.3
	24	21.3	19.9	16.3
	36	12.9	13.1	13.1
	42	9.9	10.1	10.4
	48	7.7	7.8	8.1
	65	3.6	3.7	4.0
70				4.2
				3.1
75				3.3
				2.6

62.3 t rear counterweight and 20 t carbody counterweight

Load capacities in [t] with 69.8 m main boom

	Jib length [m]			
	11	14	17	20
Radius [m]	7.4	24.6		
	9	24.3	21.3	
	10	24.0	21.3	18.9
	11	23.7	21.2	18.9
	18	20.0	18.6	17.0
	26	15.9	15.6	14.6
	28	15.0	14.7	13.9
	38	11.1	11.2	11.3
	46	7.8	8.0	8.2
	48	7.2	7.3	7.5
65	3.1	3.2	3.4	3.5
	70	2.3	2.4	2.5
70				2.6

62.3 t rear counterweight and 20 t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

 **Crane Planner 2.0**

Load capacities with fixed jib 30°

Load capacities in [t] with 20 m main boom

	Jib length [m]			
	11	14	20	26
Radius [m]	8.3	32.0		
	11	27.2	22.5	
	14	24.0	19.3	14.4
	18	21.8	16.6	12.0
	20	21.9	15.8	11.2
	22	22.0	15.9	10.5
	24	21.0	16.1	10.0
	26	20.2	15.5	10.0
	30	18.7	14.4	10.4
	34		13.8	9.7
40			9.0	7.2
	46			6.3

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 40.4 m main boom

	Jib length [m]			
	11	14	20	26
Radius [m]	9	35.7		
	11	34.4	27.9	
	16	29.7	24.5	16.6
	20	26.9	22.7	15.0
	28	20.6	19.0	12.6
	30	18.6	17.9	12.2
	38	13.0	13.3	11.1
	40	12.0	12.2	10.8
	48	8.8	9.0	9.4
	50		8.3	8.7
55				7.2
	60			6.6

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 52.1m main boom

	Jib length [m]			
	11	14	20	26
Radius [m]	9.5	32.4		
	12	31.0	26.0	
	16	28.0	23.8	16.5
	20	25.4	21.7	15.1
	30	18.1	17.2	12.7
	32	16.4	16.4	12.3
	40	11.5	11.7	11.1
	42	10.6	10.8	10.7
	55	6.2	6.4	6.8
	60		5.2	5.5
65			4.5	4.8
	70			3.9

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 60.8 m main boom

	Jib length [m]			
	11	14	20	26
Radius [m]	9.8	27.4		
	12	26.6	22.5	
	16	24.3	21.1	15.3
	20	22.2	19.6	14.5
	28	17.7	16.5	12.8
	30	16.7	15.7	12.5
	38	12.1	12.4	11.3
	40	11.1	11.4	10.9
	48	7.9	8.1	8.5
	60	4.7	4.8	5.2
65		3.7	3.8	4.2
	75			2.4

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 69.8 m main boom

	Jib length [m]			
	11	14	17	20
Radius [m]	10.1	21.8		
	12	21.5	18.3	
	14	20.8	18.0	15.6
	16	19.8	17.5	15.4
	26	16.2	14.7	13.2
	42	9.7	9.9	10.1
	44	8.9	9.1	9.4
	55	5.4	5.6	5.8
	60	4.2	4.4	4.6
	65	3.2	3.4	3.6
70	2.4	2.5	2.7	2.8
	75			2.0

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.




www.liebherr.com/CranePlanner

 **Crane Planner 2.0**

Fixed jib 0806.xx

Jib lengths 11-32 m

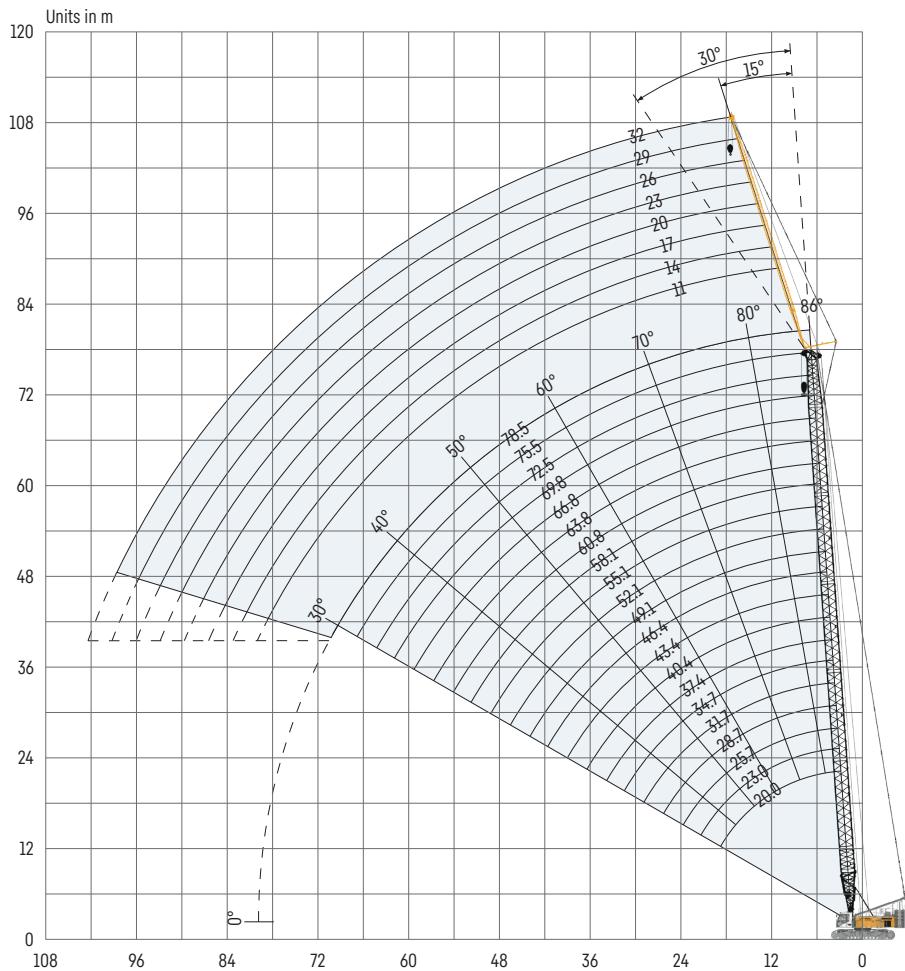

Jib configuration 0806.xx

Jib section	Amount of jib sections							
Jib foot 5.5 m	1	1	1	1	1	1	1	1
Jib section 3 m		1		1		1		1
Jib section 6 m			1	1	2	2	3	3
Jib head 5.5 m	1	1	1	1	1	1	1	1
Jib length [m]	11	14	17	20	23	26	29	32

For main boom configuration please refer to the table on page 18.

Load capacities with fixed jib 15°

Load capacities in [t] with 20 m main boom

	Jib length [m]			
	11	20	26	32
7	21.1			
10	19.5	8.0		
13	18.1	7.2	5.3	
16	17.1	6.5	4.9	3.0
18	16.7	6.2	4.6	2.6
20	16.4	5.9	4.4	2.4
22	16.1	5.7	4.2	2.2
24	15.8	5.5	4.1	2.1
28	14.9	5.2	3.8	
30	14.4	5.0	3.7	
38		4.9	3.5	
44			3.4	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 40.4 m main boom

	Jib length [m]			
	11	20	26	32
6.6	18.8			
11	16.8	7.4		
13	16.7	6.9	4.6	
16	16.7	6.6	4.3	2.8
18	16.7	6.3	4.1	2.6
20	16.7	6.0	4.0	2.5
22	16.7	5.9	3.9	2.3
24	16.7	5.8	3.8	2.0
32	16.1	5.6	3.7	
48	9.5	5.5	3.6	
55		5.5	3.6	
60			3.6	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 58.1m main boom

	Jib length [m]			
	11	14	20	26
7.2	13.6			
9	13.1	9.8		
11	12.6	9.3	5.9	
14	12.2	8.9	5.6	3.1
22	11.6	8.8	5.1	2.2
28	11.6	8.8	5.0	2.0
42	10.6	8.8	5.0	2.0
55	6.6	6.8	5.0	2.0
60	5.5	5.7	5.0	2.0
65		4.6	4.4	2.0
70			3.8	2.0
75				2.0

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 72.5m main boom

	Jib length [m]			
	11	14	20	23
7.7	10.9			
9	10.7	8.1		
11	10.2	7.6		
12	10.0	7.3	4.7	
13	9.9	7.1	4.5	3.3
18	9.7	6.8	3.7	2.5
20	9.7	6.8	3.5	2.3
22	9.7	6.8	3.5	2.2
24	9.7	6.8	3.5	2.1
26	9.7	6.8	3.5	2.0
46	8.3	6.8	3.5	
75			2.3	

62.3t rear counterweight and 20t carbody counterweight

Load capacities in [t] with 78.5 m main boom

	Jib length [m]			
	11	14	17	20
7.9	9.7			
10	9.3	7.0		
11	9.0	6.7	5.2	
12	8.7	6.4	5.0	3.9
18	8.0	5.7	4.1	3.1
20	8.0	5.6	4.0	2.8
38	7.7	5.6	4.0	2.7
48	6.7	5.6	4.0	2.7
55	4.9	4.9	3.9	2.7
60	3.8	3.6	3.3	2.5
65	2.9	2.8	2.7	2.1
70	2.1	2.2	2.2	

62.3t rear counterweight and 20t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

 **Crane Planner 2.0**

Load capacities with fixed jib 30°

Load capacities in [t] with 20 m main boom

	Jib length [m]			
	11	20	26	29
9	18.0			
16	16.1	5.8		
20	15.2	5.3	4.0	
22	14.6	5.1	3.8	2.7
26	13.2	4.9	3.6	2.4
30	12.3	4.7	3.5	2.2
34		4.7	3.5	2.1
38		4.7	3.5	2.0
40		4.7	3.5	
42			3.5	
44			3.5	
46			3.5	

62.3 t rear counterweight and 20 t carbody counterweight

Load capacities in [t] with 40.4 m main boom

	Jib length [m]			
	11	20	26	29
9.3	16.3			
16	15.4		5.8	
20	15.4		5.4	3.9
22	15.4		5.3	3.8
28	15.0		5.2	3.6
34	14.2		5.0	3.6
36	13.8		5.0	3.6
46	10.2		5.0	3.6
48	9.5		5.0	3.6
55			5.0	3.6
60				3.6
65				2.0

62.3 t rear counterweight and 20 t carbody counterweight

Load capacities in [t] with 58.1 m main boom

	Jib length [m]			
	11	20	26	29
9.9	11.9			
16	11.3	5.4		
20	11.3	5.1	3.2	
22	11.3	5.1	3.1	2.6
28	11.3	4.9	2.9	2.2
32	11.3	4.8	2.9	2.1
40	11.3	4.8	2.8	2.0
46	9.4	4.8	2.8	
48	8.7	4.8	2.8	
60	5.6	4.8	2.8	
70		3.8	2.8	
75			2.8	

62.3 t rear counterweight and 20 t carbody counterweight

Load capacities in [t] with 72.5 m main boom

	Jib length [m]			
	11	14	20	26
10.4	10.1			
13	9.7		7.4	
18	9.1		7.0	4.4
20	9.1		7.0	4.3
24	9.1		7.0	4.3
28	9.1		7.0	4.3
46	8.0		7.0	4.3
55	5.9		6.0	4.3
60	4.6		4.7	3.9
65	3.6		3.7	3.4
70	2.7		2.8	3.0
75				2.5

62.3 t rear counterweight and 20 t carbody counterweight

Load capacities in [t] with 78.5 m main boom

	Jib length [m]			
	11	14	20	23
10.6	9.0			
13	8.7	6.5		
18	8.1	6.0	3.9	
20	8.0	5.9	3.8	2.9
40	7.7	5.8	3.6	2.6
42	7.4	5.8	3.6	2.6
44	7.1	5.8	3.6	2.6
46	6.9	5.8	3.6	2.6
55	5.6	5.7	3.6	2.6
60	4.2	4.2	3.6	2.6
65	3.0	3.1	2.9	2.4
70	2.1	2.4	2.2	2.1

62.3 t rear counterweight and 20 t carbody counterweight

TLT 11962119. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

 **Crane Planner 2.0**



[Download datasheet](#)



[Please contact us.](#)

Liebherr-Werk Nenzing GmbH · Dr. Hans Liebherr Str. 1 · 6710 Nenzing, Austria
Phone +43 50809 41-473 · crawler.crane@liebherr.com · www.liebherr.com
facebook.com/LiebherrConstruction